




DHATEC®

Assets In Transit Deserve Optimal Care

Dragonder 19, NL-5554 GM
Valkenswaard, The Netherlands

Tel +31 497 542 527
Email info@dhatec.nl
Web www.dhatec.nl

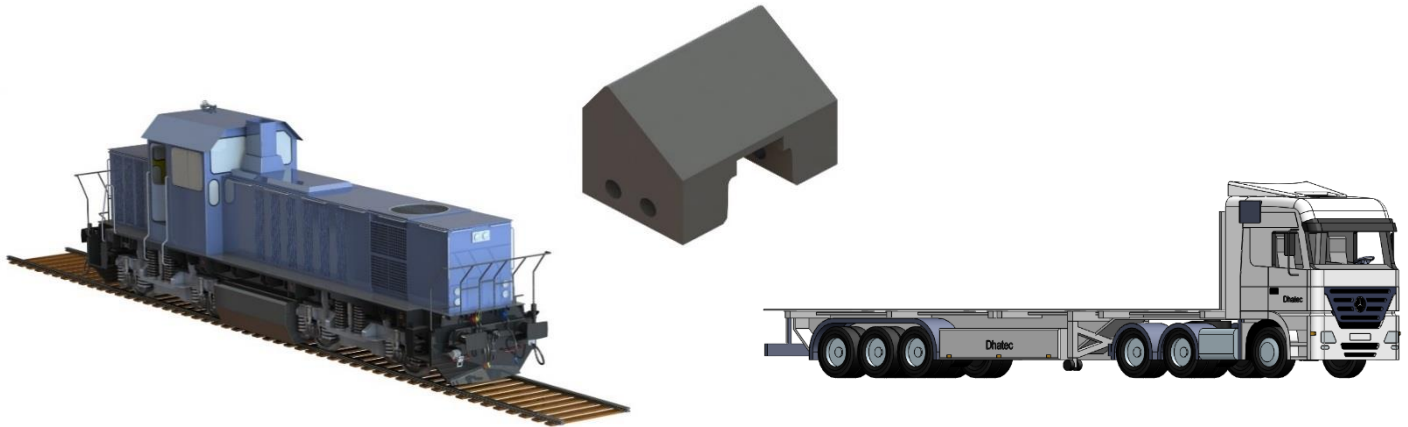

Application Procedure Specification Dhatec System88: Block A

Dhatec Document No.: DHA415-APS-S88A

Rev.	Date	Status	Prepared by	Reviewed by	Approved by
00	11.04.2017	For Construction	D.Eens	I. van Assema	I.van Assema
01	29.01.2018	For Construction	M.Voets	M. Bayens	M. Bayens

©Dhatec BV. The following document shall be considered as copyright and the design right reserved. Copying and/or disclosure of the information contained within the following document to any third-party, other than specifically for the purpose of the project is forbidden without prior written permission of the proprietor.

Change Record

Rev.	Description of Revision
00	First Issue
01	Font style

General Information

Equipment	System88
Supplier Name	Dhatec B.V.
Telephone No.	+31 497 542 527
Fax No.	+31 497 555 399
Contact email address	info@dhatec.nl

Disclaimer of liability: Every effort has been made to ensure that the information in this document is accurate and correct to the best of our knowledge, correct at the date of publication. However, Dhatec B.V. cannot be held responsible for consequences that follow from the claims that were made in this document.

Do not carry out any repairs or modifications on the equipment without consulting Dhatec B.V., doing so will invalidate the guarantee. The guarantee is also invalidated if accidents and damage of any form are caused as a result of improper use and/or not obeying the warnings in general as explained in this user guide. Dhatec B.V. accepts no responsibility for any personal accidents as a consequence of not following the safety instructions and warnings. This is also the case for consequential loss in any form.

Safety Requirements

These are general guidelines, all personnel involved should adhere to the safety requirements of the particular location at which they are performing their operations.

Dhatec recommends wearing of suitable PPE while handling their products. This includes gloves, safety shoes, safety glasses, safety helmet, hearing protection and suitable work clothing.

The working areas should be kept tidy at all times in order to minimize the risk of trips and slips.

All personnel involved should use suitable manual handling techniques and follow industry recommended guidelines for lifting and moving, such as those described in “Ergonomic Guidelines for Manual Material Handling” published by the National Institute for Occupational Safety and Health (Publication 2007-131), or those otherwise prescribed by the client.

Introduction

System88 is a safe and flexible system to efficiently transport pipes by train or truck or store them. It is a system that can easily be adjusted for different pipe diameters. The blocks are made out of a PE-compound and are safe for coated pipes.

System88 is an engineered system based on extensive research and designed following EN1025 and VDI 2700 regulations. All static and dynamic calculations for pipe transport on truck and train are evaluated and approved by TÜV Germany. As developer and manufacturer of the System88 program, Dhatec gives full technical support and advice.

Equipment

A minimum of 2 profiles per vehicle are required to support the pipes. Blocks will be secured on the profiles. Each bottom pipe is supported by a minimum of 4 blocks. The blocks are secured to the profile by Locking pins with Securing clips.

System88 steel profile (Figure 1)

The square profile is available in the standard width of a truck's trailer:

2.450mm or a train's trailer: 2700mm

The weight of the profile is approx. 20 kg (truck) / 22kg (train)



Figure 1. System88 steel profile

System88 Block A (Figure 2)

This block will be placed on the bottom-profile.

Diameter range: \varnothing 219,1 – 558,8 mm.

Weight of the Block: appr.1,8 kg.

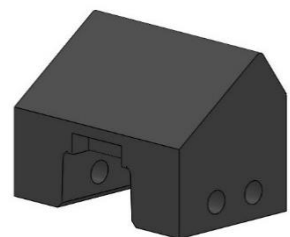


Figure 2. System88 block A

System88 block K (Figure 3)

This block will be placed on a mid-profile.

Diameter range: \varnothing 219,1 – 558,8 mm.

Weight of the Block: appr.2,8 kg.

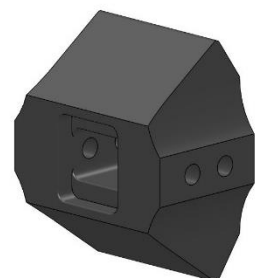


Figure 3. System88 block K

System88 block L (Figure 4)

This block will be placed on a mid-profile.

Diameter range: \varnothing 406,4 – 1.219,2 mm

Weight of the Block: approx. 7,4 kg.

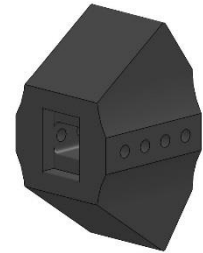


Figure 4. System88 block L

Locking pin for blocks (Figure 5)

This pin is used to secure the block on the rail. When the block and the rail align, a pin is placed through the aligned holes.

Weight of the Locking pin: approx. 0,6 kg



Figure 5. Locking pin

Securing clip for Locking pin (Figure 6)

This is a safety attribute which will decrease the chances of the pin failing to secure the block on the rail.

Weight of the clip: approx. 0,1 kg.



Figure 6. Securing clip for Locking pin

Anti-skid (NOT used when working on trains)

Anti-skid increases the friction between System88 and the load (0.3 → 0.6). Although it is not mandatory, Dhatec strongly recommends using it.

Weight of the anti-skid: approx. 1,4 kg/m.



Figure 7. Anti-skid

Tie down

Loads need to be secured to prevent movement of goods and to be allowed to travel on public roads. Each country has its own laws regarding the amount of securing needed. Dhatec bases their calculations on the norm VDI2700. Customer specific calculations can be done on request.

Using Anti-skid (truck) can greatly reduce the number of tie downs necessary. A calculation example can be found in Appendix B.

Tie downs are available in lengths of 9m or 12m.

Lashing capacity: 2500 daN (single)
5000 daN (looped)


$S_{hf} = 50\text{daN}$, $S_{tf} = 750\text{ daN}$

Norm: EN 12195-2



Connector belt

When a layer consists of 2 pipes, there is a chance the system will tilt when placing a pipe on a mid-section. To prevent this, the rail of that layer is connected to the rail of the section below.

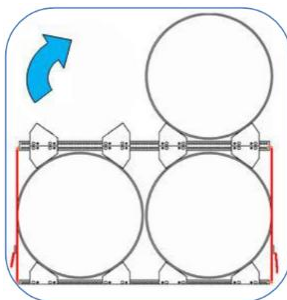

Lashing capacity: 1000 daN (single)

2000 daN (looped)

$S_{hf} = 50\text{daN}$, $S_{tf} = 100\text{ daN}$

Norm: EN 12195-2

Connector belts are 1,75m long and sold as a pair, since the rail has to be connected on both sides.



Figure 9. Connector belt

Profile-to-trailer connector

Similar to the connector belt, the Profile-to-trailer connector connects the profile to the trailer. This will prevent tilting and displacement of the bottom layer.

Lashing capacity: 1000 daN (single)
2000 daN (looped)

Norm: EN 1492-1

Profile-to-trailer connectors are 0,7m long and sold as a pair.



Figure 30. Profile-to-trailer connector

Hoisting belt

When the blocks are assembled on the rail, the total weight can be high. That's why lifting is best performed by a crane or forklift using Hoisting belts.

Lashing capacity: 1000daN (single)
2000daN (looped)

Dhatec's hoisting belts are 2m long.



General instructions for System88

Before using System88, all parts should be subjected to a visual inspection. If any below listed defect is observed, discard the relevant part.

Product failures:

- The System88 blocks (as shown in Fig. 2-4) may not show permanent imprints of pipes on the supporting faces.
- The edges of the System88 blocks may not be worn off more than 10 mm.
- The System88 blocks should always fit over the System88 profile without any problems.
- The holes in the System88 blocks may not show signs of permanent deformation or fractures. They should not be oval or have a diameter larger than Ø 23 mm.
- The holes of the System88 profile may not show signs of permanent deformation or fractures. They should not be oval or have a diameter larger than Ø 23 mm.
- The System88 profile should not show signs of bending or deflection after installation.
- The System88 steel profile (as shown in Fig. 1) may not show signs of corrosion, permanent deformation or cracks.
- The anti-skid rubber mats (figure 7) may not be torn or crushed, during or after installation.
- The Locking pin (figure 5) may not show signs of permanent deformation, fractures or corrosion.
- The Securing clip (figure 6) must have its original shape. The ring has to lock under spring tension.

When using System88, the procedures listed below should always be regarded. The following list is only a brief overview of the procedures that should be respected, a complete elaboration can be found in the following paragraphs of this chapter.

A. Installation of System88

- A.1. Preparation
- A.2. Installation of profile
- A.3. Installation of block A

B. Loading of pipes

- B.1. Verification of block settings
- B.2. Placement of bottom pipes
- B.3. Verification of support of bottom pipes
- B.4. Installation of blocks K or L
- B.5. Placement of remaining layers

C. Securing of pipes

- C.1. Applying safety features

D. Unloading of pipes

- D.1. Checking stability of pipe stack
- D.2. Unloading pipes

E. Disassembly of System88

- E.1. Removal of S88 parts

A. Installation of System88

A.1. Preparation

- Make sure the trailer is free of ice, snow, oil or anything else that could influence the friction.
- Make sure the trailer is solid. There should be no weak or rotten spots where the system will be placed.
- Make sure the trailer fits the bill. This means checking if it can handle the weight, is wide and long enough and all safety features are present.
- Place Anti-skid on places where the bottom profiles will come (Truck only).



Figure 11. Start set-up with Anti-skid in place (trucks only)

A.2. Installation of the profiles

Place the base profiles on the trailer. When the base profiles are in place, fasten (screw 10x) it to the trailer or use profile-to-trailer connectors.

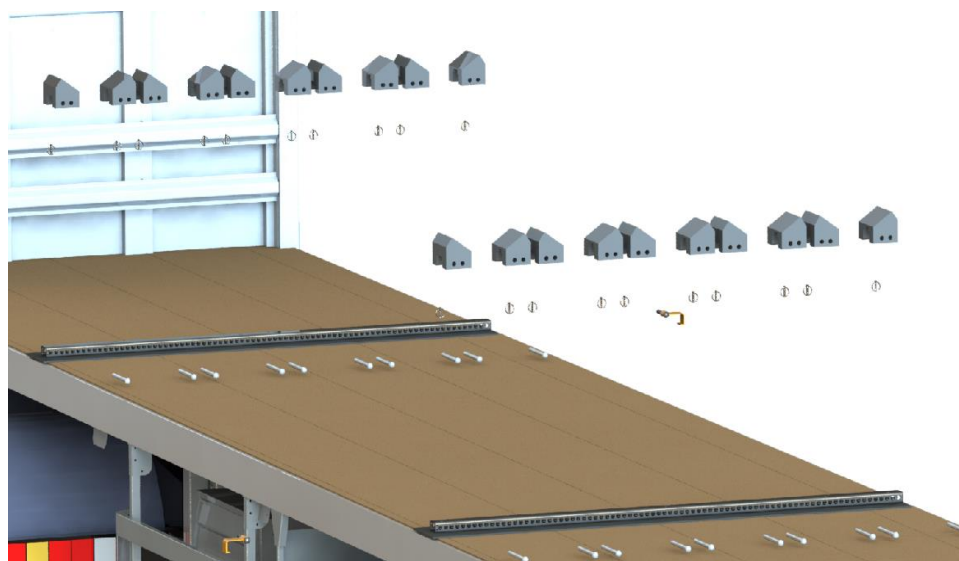


Figure 12. Fasten profile to trailer

A.3. Installation of Block A

If the base profiles are attached to the trailer, block A can be placed. Check the configuration supplied by Dhatec for their exact placement.

- When the blocks are placed on the base profile, secure them with the Locking pins and Securing clips.

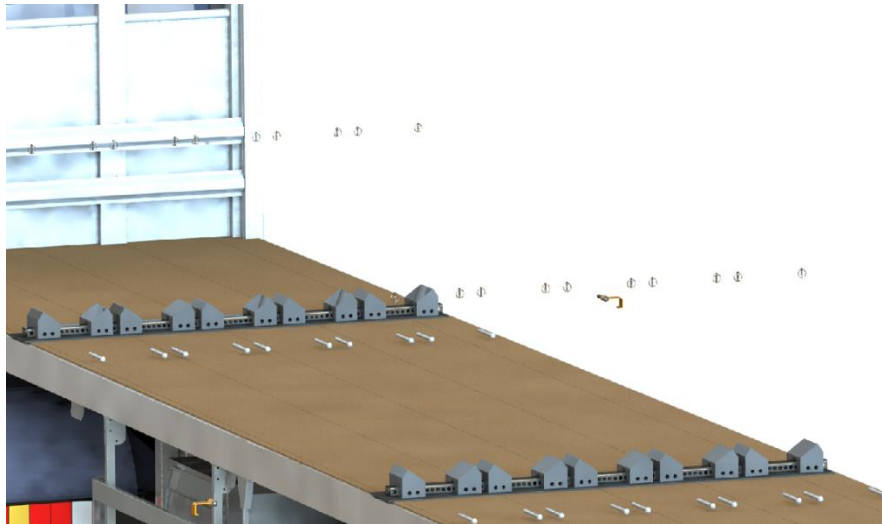


Figure 13. Place block on profile

Optional, but strongly recommended when driving without load on the system:

Make sure the rail is connected to the trailer with a Profile-to-trailer connector. Unconnected rails can cause tilting and are extremely dangerous.

Fasten the Profile-to-trailer connector with a pin to the profile, secure the pin with a clip. Hook the other end to the trailer. Only fasten the Profile-to-Trailer Connector and do not tension it. Place the Profile-to-Trailer Connector on the other side in a similar way, when both sides are fastened, they can be tensioned.

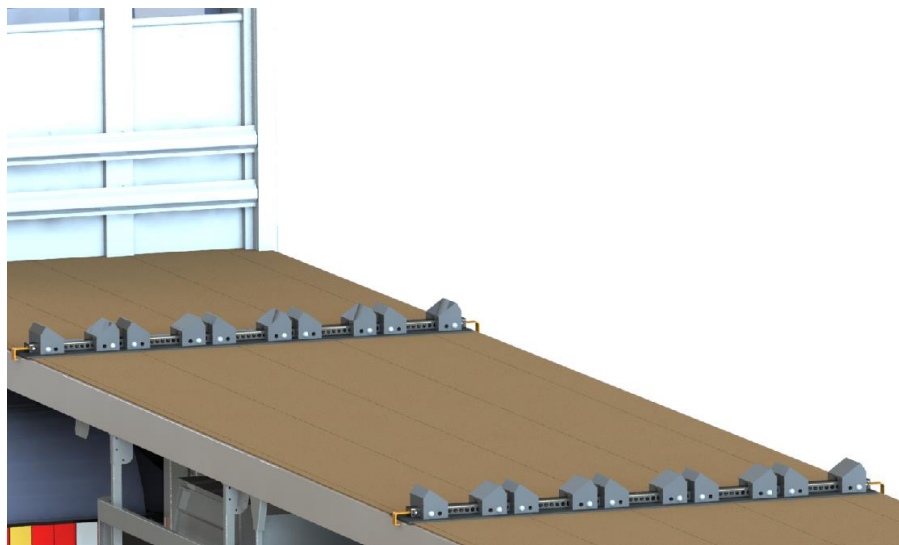


Figure 14. Lock the blocks with a pin and place profile-to-trailer connectors

Place Anti-skid on top of the blocks (Truck only). This will increase the friction between pipe and block and reduce the number of tie downs required to secure the pipe.

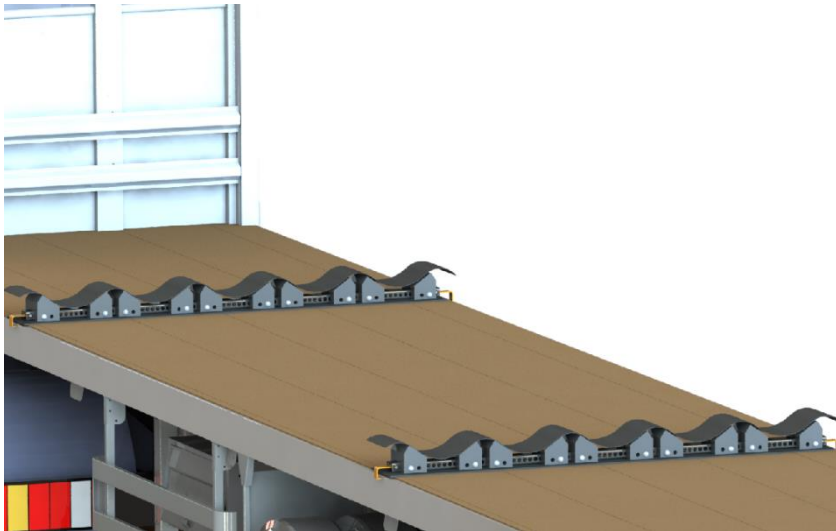


Figure 15. Place Anti-Skid on top of the blocks (truck only)

B. Loading of pipes

B.1. Verification of block settings

When everything is in place, re-check the distances between the blocks. When the measurements don't comply, start over.

B.2. Placement of bottom pipes of stack

If everything is checked and approved, it's time to place the first layer of pipes onto the system.

- Make sure that the pipe surface is free from snow, ice, oil or anything that could influence friction between pipe and block.
- For trucks only: Although not mandatory, we strongly recommend placing an Anti-skid layer on the PE-blocks.

There should be Anti-skid:

- o Between the rail and the trailer
- o Between the base blocks and the pipes
- o Between the pipes and the mid blocks (both sides)

Place the first pipe. Check the gap between the rail and the pipe and see if it matches the dimensions on the configurations.

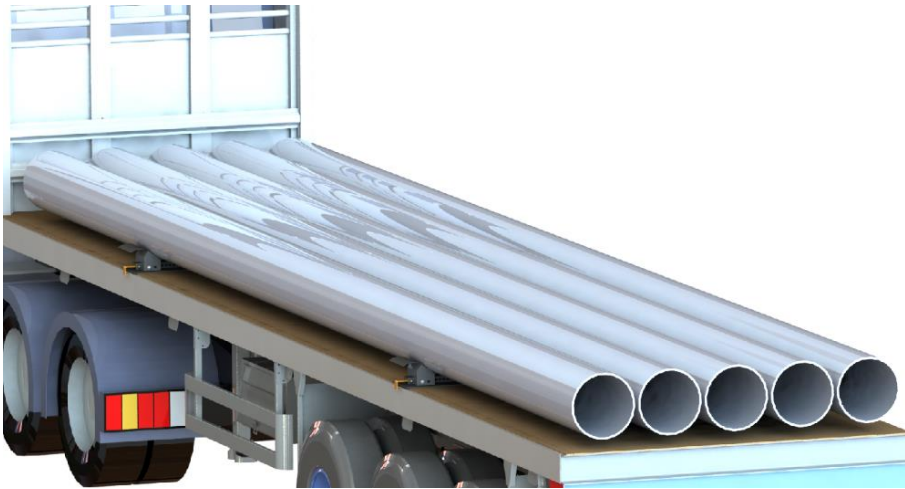


Figure 16. Place pipes on the bottom blocks



Figure 17. Place Anti-skid on the bottom layer (Truck only)

B.3. Verification of support of bottom pipes

When the first layer is in place, make sure every pipe is stable. Check the distance between the pipes and between the pipes and rail and compare with the configuration.

B.4. Installation of Blocks K or L

When the first layer of pipes is in place, another rail needs to be placed. The easiest way to prepare this rail is to place blocks K or L when the rail is not yet in place. Check the positioning of the blocks in the configuration and secure them the same way as the blocks on the base profile (Locking pins with Securing clips).

After everything is secured, place the rail on top of the pipes as shown in figure 18. Due to the weight, we advise to use a hoisting belt to place the mid-section on the pipes.

Make sure both the blocks and the rails align. Connect the rail to the bottom rail using a Connector belt. This will prevent tilting of the load while loading pipes.



Figure 18. Place the mid-section with blocks on top of the bottom layer



Figure 19. Place the Connector belts



Figure 20. Place Anti-skid on the mid-section (Truck only)

B.5. Placement of remaining layers

If the first layer is stable and approved, the next layers can be placed likewise.
(Remember to use Anti-skid (truck only) and connector belts where choosing to)



Figure 21. Place remaining layers

C. Securing of pipes

C.1. Applying safety features

Before securing the pipes, check if the measurements of the load match the measurements on the configuration. Using anti-skid is not mandatory, neither is using a profile-to-trailer connector when driving with a load and connector belts when transporting layers that consists of 3 or more pipes.

A couple of safety features could already be in place: Profile-to-trailer connector, connector belts, anti-skid (truck). The last step is placing tie downs (and optional Slide Stops) along the length of the trailer.



Figure 22. Place other safety attributes

The number of tie downs depends on the weight of the load.

Total weight of the pipes	Number of tie-downs ($S_{TF}750$ daN, LC 2500)	
	With Anti-skid layers	Without Anti-skid layers
30.000 kg	9	45
25.000 kg	8	38
20.000 kg	6	30
15.000 kg	5	25
10.000 kg	3	15
5.000 kg	2	8

A calculation example of the required number of tie downs for a 20t load is provided in Appendix C.

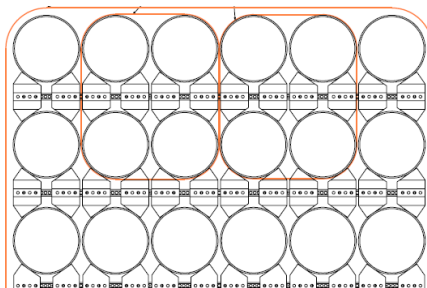


Figure 43. Example Strapping scheme

As seen in the table above, using anti-skid significantly lowers the number of tie downs needed to secure the load. Always use enough tie downs.

Divide the tie downs evenly along the length of the load. Make sure they are not twisted.

Anti-skid may only be used on trucks, NOT on trains

If the top layers contain more than 2 pipes, the middle pipes on top are not secured with tie downs. This can be rectified by using Slide Stop. Because Slide Stop is an engineered pre-shaped beam, when tensioned it will secure the middle pipes. This can also be done by placing tie downs around smaller sections of pipes. When necessary, ask Dhatec for a strapping scheme.



Figure 54. Working principle of Slide stop



Figure 25. Truck ready to go



Figure 26. Flatcar ready to go

When finished, re-check every tie down, connector belt, Profile-to-trailer connector and Slide Stop.
Every driver is responsible for his or her own load. Adapt driving style to weather conditions.

D. Unloading of pipes**D.1. Check stability of pipe stack**

Before unloading the pipes, be sure the stack is stable. This means no pipe will shift or start to roll when unloading another pipe.

Be careful when removing tie-downs because of the high tension.

D.2. Unloading pipes

Start unloading with the outer pipes. Make sure the connector belts and profile-to-trailer connectors stay in place until the entire parent layer is unloaded.

When unloading the outer pipes, unload the corresponding pipe on the other side next to minimize the risk of tipping.

If an entire layer is unloaded, the connector belt from that layer can be removed. With a hoisting belt, the rail and blocks can be lifted off as 1 piece.

E. Disassembly of System88**E.1. Removal of S88 parts**

When the pipes are unloaded, the System88 parts can be disassembled. Follow steps A3-A2-A1.

Collect every pin with Securing clip used to hold the blocks in place. Make sure the Securing clips don't show deformations. If any show deformations, discard them.

Check the blocks for pipe imprints. If any deformation is permanent, the block needs to be replaced. The wear on the edge shouldn't exceed 10mm.

End note

This recommended practice is put together with great care. When safety risks are noticed which are not covered by this instruction please contact Dhatec to share this finding.

[1] Pipe Configurations are supplied with the first delivery, contact our office for copies and updates.

[2] Truck drivers should have been educated to load their vehicles properly and therefore are assumed to be familiar with loading prescriptions.




STANDARD TRUCK CONFIGURATION

It is not allowed to stack pipes Ø 273,1 in PYRAMIDS on System88 Block A and K.



Page A-02

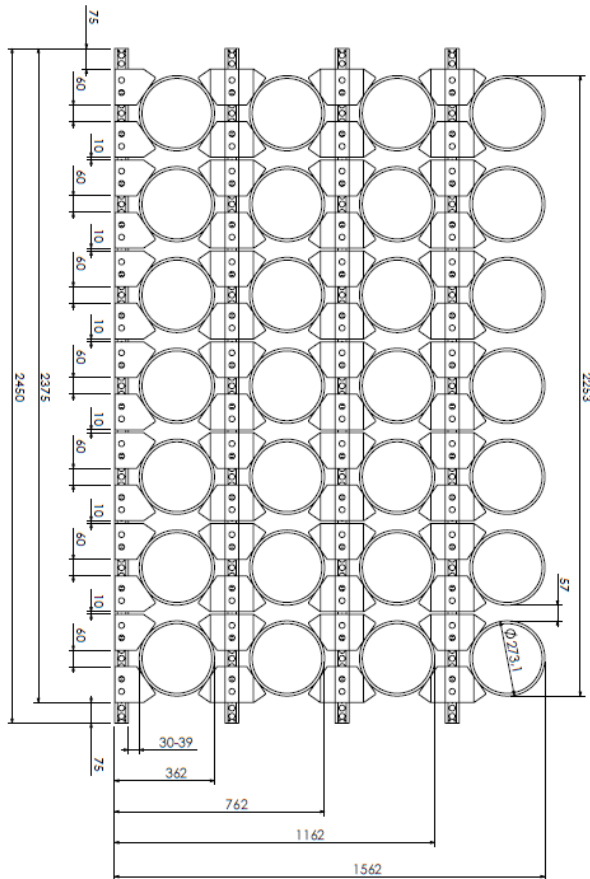

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eikensdijk 8
5571 SK, Bergeijk
The Netherlands


Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EOIR no. NI809630539
VAT no. NI809630539 B01
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62

System88 - Truck

Block	Type A	Type K
Block in middle	28	28
Number of pipes	273,1	273,1
Outside diameter [mm]	10	10
Actual distance from pipe to profile [mm]	30-39	30-39
Actual distance between pipes [mm]	57	57

- Always check system88 instructions before use
- Maximum load of 5,925 kg on block A
- Maximum load of 5,150 kg on block K
- Check your vehicle specifications for total maximum load
- Always use proper tie-down technique
- Replace block in case it shows permanent deformation
- The pipes must be supported by the blocks only and not touch the steel profile
- The blocks can be protected with rubber feet in order to prevent damage to the ground
- If using ratchet tie-downs, tighten tie-downs again after 10 minutes**
- (** due to relaxation tie-downs need retightening)
- If multiple pipes are transported at the same time, all pipes are secured
- Deviate from this advice only in consult with Dhatec

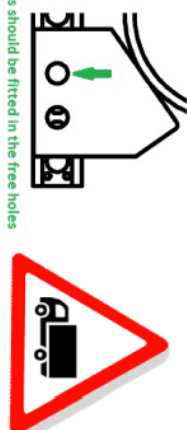

Pins should be fitted in the free holes
The sum of all tie-downs must be 5,520 dcm for 25 ton load (check label on tie-down)
The sum of all tie-downs must be 5,520 dcm for 25 ton load (check label on tie-down)

Revision date:
3-6-2016






STANDARD TRUCK CONFIGURATION



Page A-03

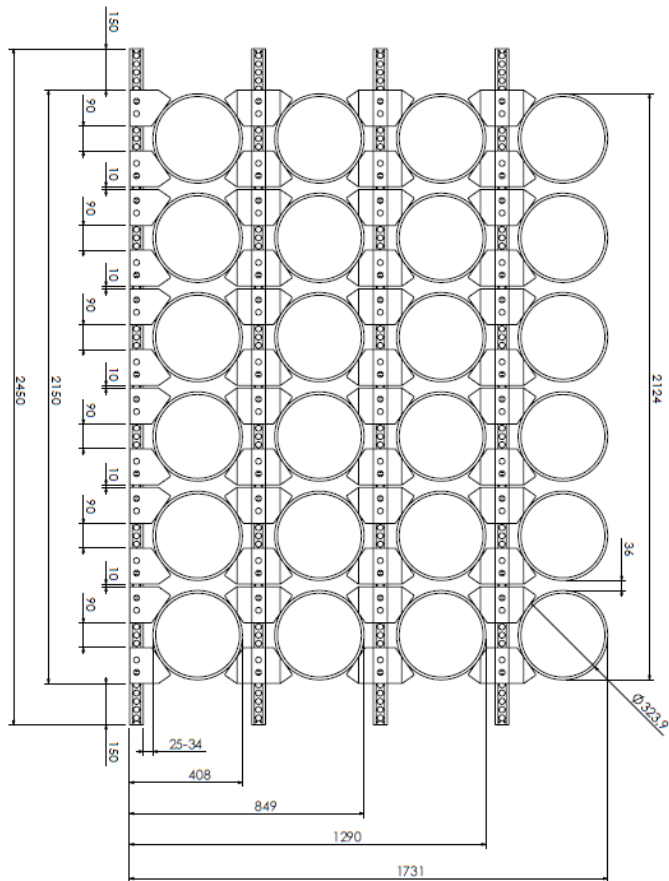

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eikensdijk 8
5571 SK, Bergeijk
The Netherlands


Tel. +31 497 542527
Fax. +31 497 553399
Email: info@dhatec.nl
Web: www.dhatec.nl

EOIR no. NL809630539
VAT no. NL809630539.801
Chamber of Commerce no. 17074402
IBAN no. NL38 RABO 0172 9113 62

System88 - Truck

Block	Type A	Type K
Block in middle	24	24
Number of pipes	323.9	323.9
Outside diameter [mm]	12	12
Actual distance from pipe to profile [mm]	25-34	25-34
Actual distance between pipes [mm]	34	34

- Always check System88 instructions before use
- Always use correct tie-down technique
- Check your vehicle specifications for total maximum load
- Maximum load of 3.150 kg on block K
- Always secure each block with 1 locking pin
- Always use correct tie-down technique
- The pipes must be supported by the blocks only and not touch the steel profile
- The blocks can be provided with rubber layer on request
- Always use rubber tie-downs in combination with rubber layer
- If you use the blocks in combination with rubber layer, the tie-downs must be tightened after 10 minutes
- Make sure when multiple pipes are transported at the same time, all pipes deviate from this advice only in consult with Dhatec



Pins should be fitted in the tie holes



The sum of all tie-downs must be 5.540 daN for 25 ton load (check label on the down)
The sum of all tie-downs must be 4.870 daN for 30 ton load (check label on the down)

Revision date:
3-6-2016



SHEET 1 OF 1




STANDARD TRUCK CONFIGURATION



Assets In Transit Deserve Optimal Care

Page A-04

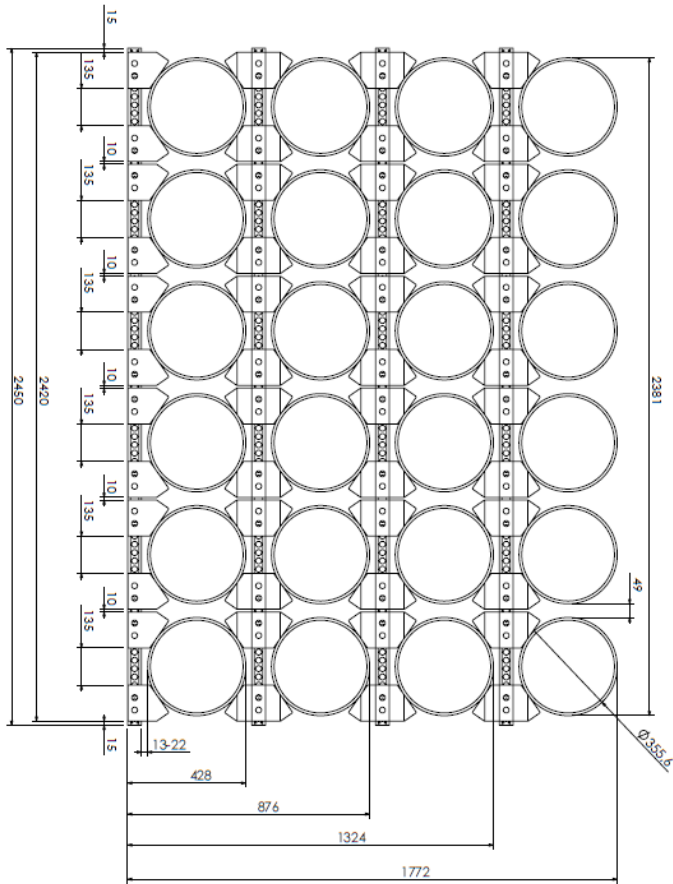

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eindhoven
5573 XJ
The Netherlands


Tel. +31 407 542527
Fax: +31 407 555379
E-mail: info@dhatec.nl
Web: www.dhatec.nl

EORI no. NL809630639
VAT no. NL809630639B01
Company reg. no. 17072402
IBAN no. NL55 RABO 0172 9113 02

System88 - Truck

Block	Type A	Type K
Block in middle	24	24
Number of pipes	24	24
Outside diameter [mm]	355.6	355.6
Outside diameter [inch]	14	14
Actual distance from pipe to profile [mm]	13-22	13-22
Actual distance between pipes [mm]	428	428

- Always check system88 instructions before use
- Maximum load of 3.935 kg on block A
- Maximum load of 3.150 kg on block K
- Check your vehicle specifications for total maximum load
- Always use the correct blocking technique
- Repairs block, because it shows permanent deformation
- The pipes must be supported by the blocks only and not touch the steel profile
- The blocks can be provided with rubber layer on request
- If using rubbered tie-downs, tighten tie-downs again after 10 minutes**
- ** due to relaxation tie-downs need retightening
- Make sure when multiple pipes are transported at the same time, all pipes
- Deviate from this advice only in consult with Dhatec

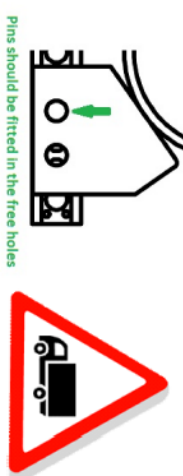

Pins should be fitted in the free holes

The sum of all tie-downs must be 5.540 daN for 25 ton load (check label on tie-down)
The sum of all tie-downs must be 4.270 daN for 20 ton load (check label on tie-down)

Revision date:
3-6-2016



SHEET 1 OF 1

STANDARD TRUCK CONFIGURATION




Assets In Transit Deserve Optimal Care

System88 - Truck

System88 - Truck		Ø 355,6
Block	Block in middle	Type A
Number of pipes	Outside diameter [mm]	29
	Outside diameter [inch]	355,6
	Actual distance from pipe to profile [mm]	14
	Actual distance between pipes [mm]	13-22
		49


- Always check 3-way/5-point instructions before use
- Maximum load 150 kg
- Maximum load of 1 500 kg on block x
- Check your vehicle specifications for total maximum load
- Replicate block in case a shock permanent deformation the pipes must be supported by the blocks only and not touch the steel profile
- Always use ratchet the down in combination with rubber tyre
- If using cratchet the down, tighten the down again after 10 minutes**
- ** due to relaxation the down need re-tightening
- Use of more than multiple pipes are disallowed at the same time, all pipes are secured
- Deviate from this advice only in consult with Döhner

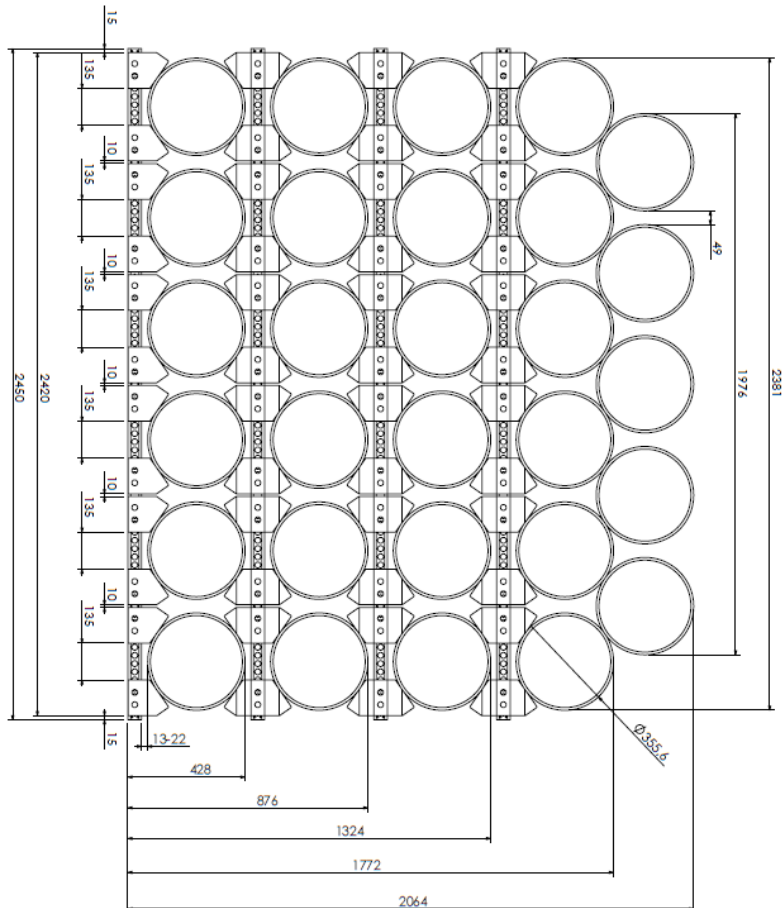

Dhatec B.V.
Elkensakker 8
5571 SK, Bergeijk
The Netherlands

Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EORI no. NL809630539
VAT no. NL8096.30.539.B01
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62



Pins should be fitted in the free holes

The sum of all tie-downs must be 5,560 dan for 25 ton load (check label on tie-down)
The sum of all tie-downs must be 6,670 dan for 30 ton load (check label on tie-down)

Revision date:
3-6-2016

STANDARD TRUCK CONFIGURATION




Assets In Transit Deserve Optimal Care

System88 - Truck	Ø 406,4
------------------	---------


Block	Type A
Block in middle	Type K
Number of pipes	20
Outside diameter [mm]	406.4
Outside diameter [inch]	16
Actual distance from pipe to profile [mm]	14-23
Actual distance between pipes [mm]	29

- Always check system instructions before use
- Always use correct tools and techniques
- Maximum load of 1500 kg on block A
- Check your vehicle specifications for total maximum load
- Always secure each block with 1 locking pin
- The blocks must be secured in the correct order
- The pipes must be supported by the blocks only and not touch the steel profile
- The blocks can be provided with rubber tyre, on request
- If using rubber tyre, the tyre must be secured in the correct order (see tyre layer)
- If using rubber tyre, tighten the down-ropes again after 10 minutes**
- ** due to relaxation the down-ropes need re-tightening
- If using multiple pipes, one ramped up at the same time, all pipes are secured
- Deviate from this advice only in consult with Ditchc



Pins should be fitted in the free holes

The sum of all tie-downs must be 5,560 dan for 25 ton load (check label on tie-down)
The sum of all tie-downs must be 6,670 dan for 30 ton load (check label on tie-down)

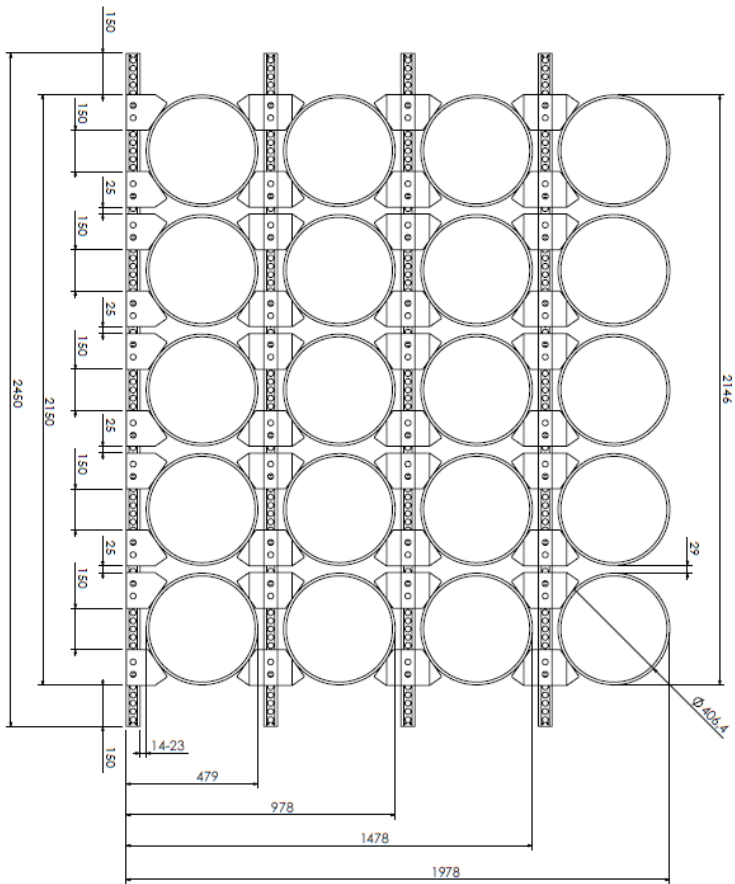

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Elskensakker 8
5571 SK, Bergeijk
The Netherlands


Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EORI no. NL809630539
VAT no. NL8096.30.539.B01
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62





STANDARD TRUCK CONFIGURATION

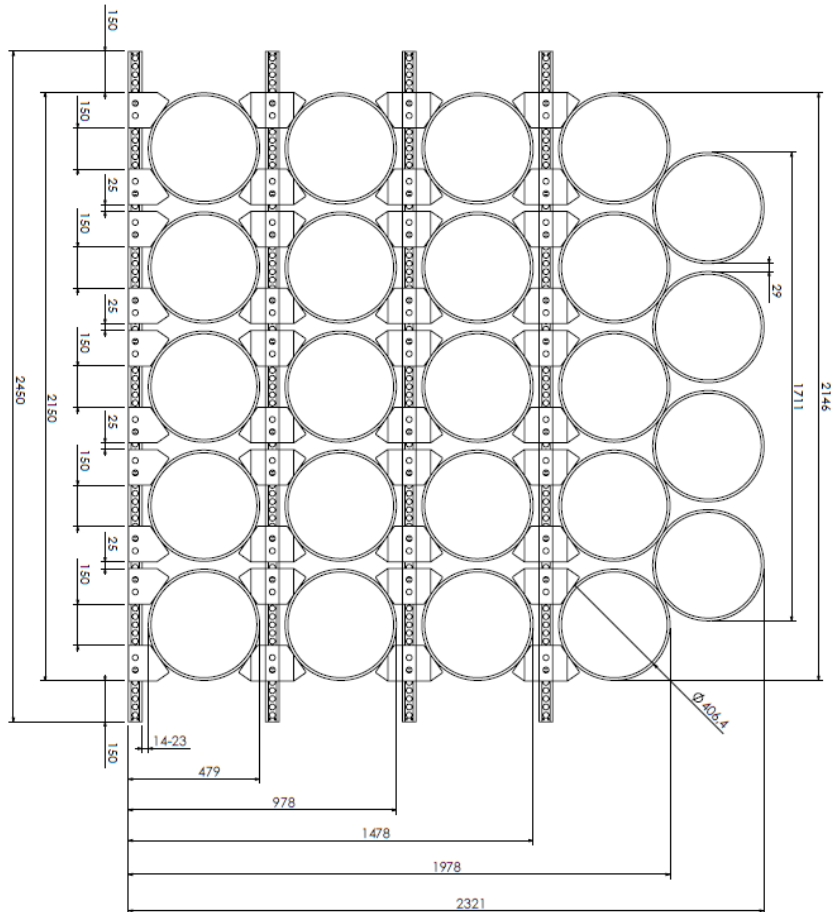

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eukensdijk 8
5571 SK, Bergeijk
The Netherlands

Tel. +31 497 543527
Fax: +31 497 555389
Email: info@dhatec.nl
Web: www.dhatec.nl

EOH no. NI809430539
VAT no. NI809430539 B01
Chamber of Commerce no. 17074402
IBAN no. NISS RABO 0172 9113 92




Page A-05-1

System88 - Truck

Block	Type A	Type K
Block in middle	24	24
Number of pipes	406.4	14
Outside diameter [mm]	14-23	27
Actual distance from pipe to profile [mm]		
Actual distance between pipes [mm]		

- Always check system's instructions before use
- Always use correct tie-down technique
- Check your vehicle specifications for total maximum load
- Maximum load of 3150 kg on block K
- Always secure each block with 1 locking pin
- Always use correct tie-down technique
- The pipes must be supported by the blocks only and not touch the steel profile
- The blocks can be provided with rubber layer on request
- Always use correct tie-down technique in combination with rubber layer
- Always use correct tie-down technique when the system is used for more than 10 minutes
- Make sure when multiple pipes are transported at the same time, all pipes
- Deviate from this advice only in consult with Dhatec

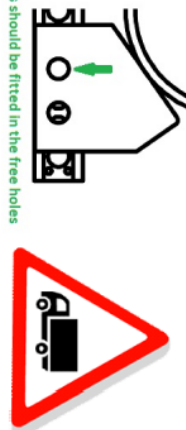

Pins should be fitted in the free holes

The sum of all tie-downs must be 5,540 daN for 25 ton load (check label on tie-down)
The sum of all tie-downs must be 4,870 daN for 30 ton load (check label on tie-down)


Revision date:
3-6-2016



STANDARD TRUCK CONFIGURATION



Page A-06

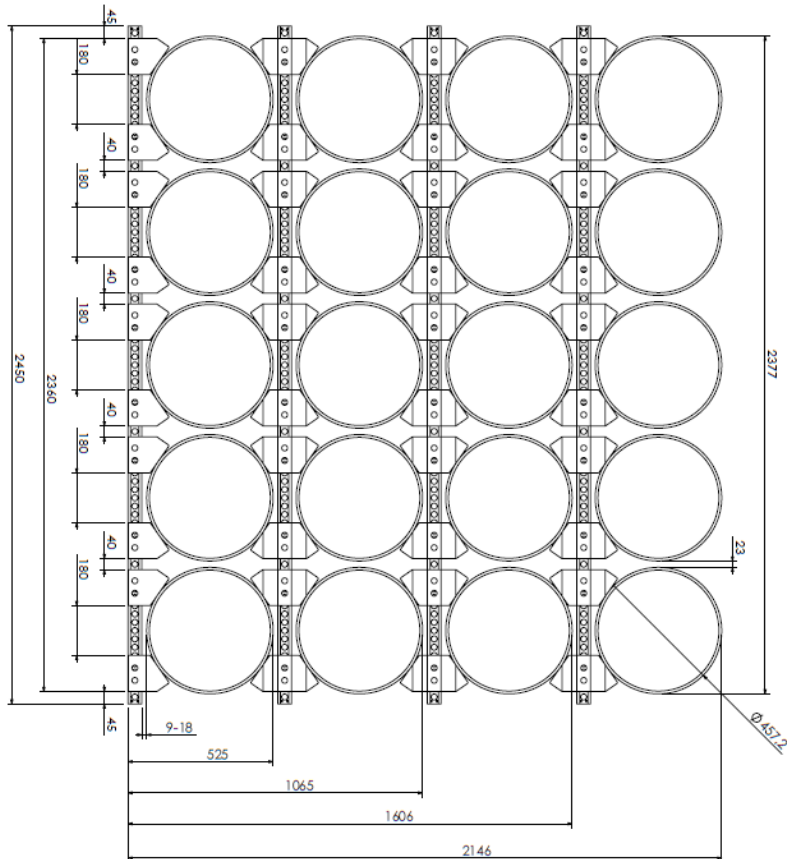

All dimensions are in mm
Drawing to scale
Scale 1:15


Dhatec B.V.
Elskensakker 8
5571 SK, Bergeijk
The Netherlands

Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EORI no. NL809630539
VAT no. NL8096.30.539.B01
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62

System88 - Truck		Ø 457,2
Block	Type A	
Block in middle	Type K	
Number of pipes	20	
Outside diameter [mm]	457,2	
Outside diameter [inch]	18	
Actual distance from pipe to profile [mm]	9-18	
Actual distance between pipes [mm]	23	

- Always check system's instructions before use
- Maximum load of 150 kg on block K
- Maximum load of 30 kg on block R
- Check your vehicle specifications for total maximum load
- Replicate block in case a shock permanent deformation the pipes must be supported by the blocks only and not touch the steel profile
- "Always ensure the load is distributed evenly and not concentrated on a single point" (always ensure the load is distributed evenly and not concentrated on a single point)
- If using ratchet tie-downs, tighten tie-downs again after 10 minutes**
- If using multiple pipes are transported at the same time, all pipes are secured
- Deviate from this advice only in consult with Dethlefs

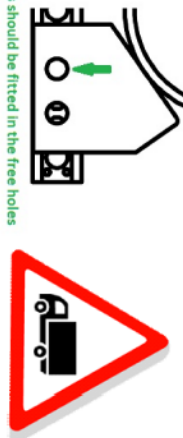

The sum of all tie-downs must be 5,560 dan for 25 ton load (check label on tie-down)
The sum of all tie-downs must be 6,670 dan for 30 ton load (check label on tie-down)


Revision date:
3-6-2016



STANDARD TRUCK CONFIGURATION



Page A-06-1

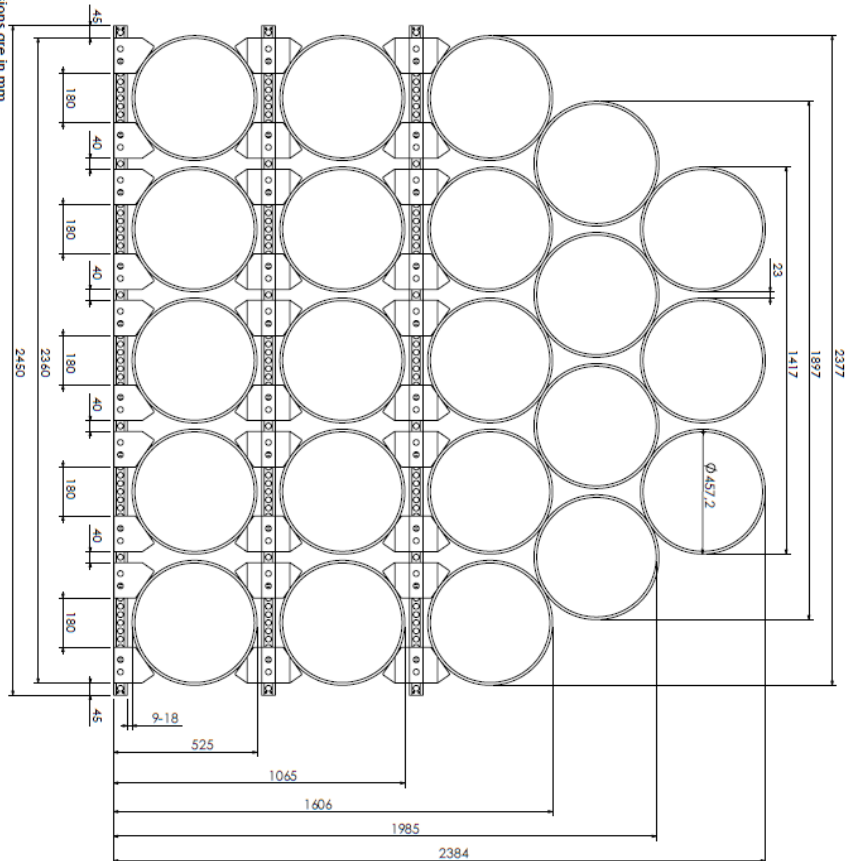

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eikensdijk 8
5571 SK, Bergeijk
The Netherlands


Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EOIR no. NL809630539
VAT no. NL8096.30.539.801
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62

System88 - Truck

Block	Type A	Type K
Block in middle	22	22
Number of pipes	22	22
Outside diameter [mm]	457.2	457.2
Outside diameter [inch]	18	18
Actual distance from pipe to profile [mm]	9.18	9.18
Actual distance between pipes [mm]	23	23

- Always check System88 instructions before use
- Maximum load of 3150 kg on block A
- Maximum load of 3150 kg on block K
- Check your vehicle specifications for total maximum load
- Always block each block with 1 locking pin
- Always block each block with 1 locking pin
- The pipes must be supported by the blocks only and not touch the steel profile
- The blocks can be provided with rubber layer on request
- The blocks can be provided with rubber layer on request
- If using rubber tie-downs, tighten tie-downs again after 10 minutes**
- (** due to relaxation tie-downs need retightening)
- Make sure when multiple pipes are transported at the same time, all pipes
- Deviate from this advice only in consult with Dhatec

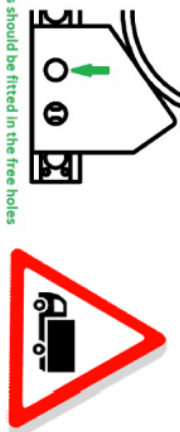

Pins should be fitted in the free holes

The sum of all tie-downs must be 5470 daN for 25 ton load (check label on tie-down)
The sum of all tie-downs must be 5470 daN for 30 ton load (check label on tie-down)

Revision date:
3-6-2016






STANDARD TRUCK CONFIGURATION



Page A-07


All dimensions are in mm
Drawing to scale
Scale 1:15

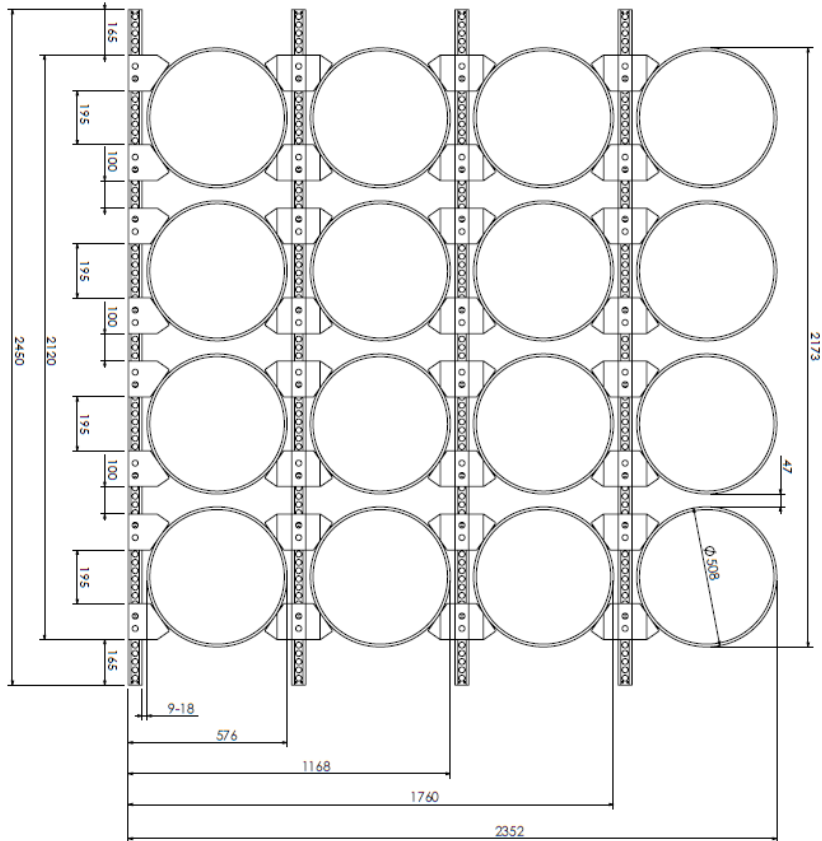

System88 - Truck

Block	Type A	Ø 508.0
Block in middle	Type K	
Number of pipes	16	
Outside diameter [mm]	508.0	
Outside diameter [inch]	20	
Actual distance from pipe to profile [mm]	9-18	
Actual distance between pipes [mm]	47	

- Always check System88 instructions before use
- Always use the correct pin for the correct deformation
- Check your vehicle specifications for total maximum load
- Maximum load of 3.150 kg on block K
- Always secure each block with 1 locking pin
- The pipes must be supported by the blocks only and not touch the steel profile
- The blocks can be provided with rubber layer on request
- (** due to relaxation the-downs need relighting
- Make sure when multiple pipes are transported of the same time, all pipes
- Deviate from this advice only in consult with Dhatec

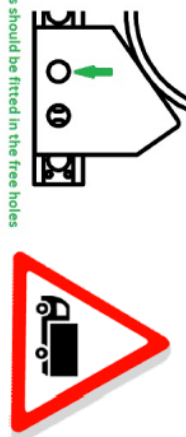

Pins should be fitted in the free holes

The sum of all lie-downs must be 5.540 dcm for 25 ton load (check label on lie-down)
The sum of all lie-downs must be 4.870 dcm for 20 ton load (check label on lie-down)

Revision date:
3-6-2016

Dhatec B.V.
Eikenvolder 8
5273 KJ, Breda
The Netherlands

Tel. +31 497 542527
Fax: +31 497 553399
E-mail: info@dhatec.nl
Web: www.dhatec.nl

EORI no. NL809630539
VAT no. NL809630539 B01
Company no. 17074402
IBAN no. NL55 RABO 0172 9113 42



STANDARD TRUCK CONFIGURATION




Assets In Transit Deserve Optimal Care

Page A-07-1

Ø 508,0

Block	Type A	Type K
Block in middle	15	
Number of pipes	508.0	
Outside diameter [mm]	20	
Outside diameter [inch]	7/8	
Actual distance from pipe to profile [mm]		47


- Always check system's instructions before use
- Maximum load is 150 lb on block A
- Check your vehicle specifications for total maximum load
- Always secure each block with 1 locking pin
- The pins must be secured with the correct information
- The pipes must be supported by the blocks only and not touch the steel profile
- The blocks can be used with rubber footers, support rollers, or support rollers (not for use with rubber footers)
- If using cranked tie-downs, tighten tie-downs again after 10 minutes**
- Make sure tie-downs need replacement if the same time, all pipes are secured
- Make sure tie-downs are inspected at the same time, all pipes are secured
- Deviate from this advice only in consult with Dethlefs



Pins should be fitted in the free holes

The sum of all tie-downs must be 5,560 DAN for 25 ton load (check label on tie-down)
The sum of all tie-downs must be 6,670 DAN for 30 ton load (check label on tie-down)

All dimensions are in mm
Drawing to scale
Scale 1:15

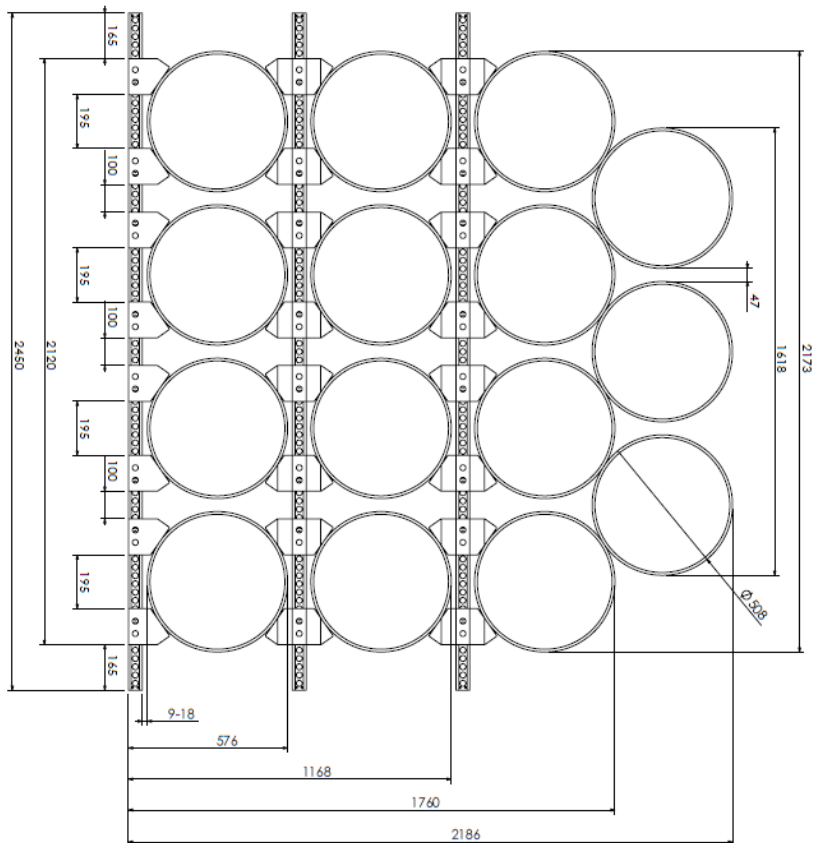

Dhatec B.V.
Elskensakker 8
5571 SK, Bergeijk
The Netherlands

Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EOIR no. NL809630539
VAT no. NL8096.30.539.B01
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62


Revision date:
3-6-2016



STANDARD TRUCK CONFIGURATION



Page A-08-1

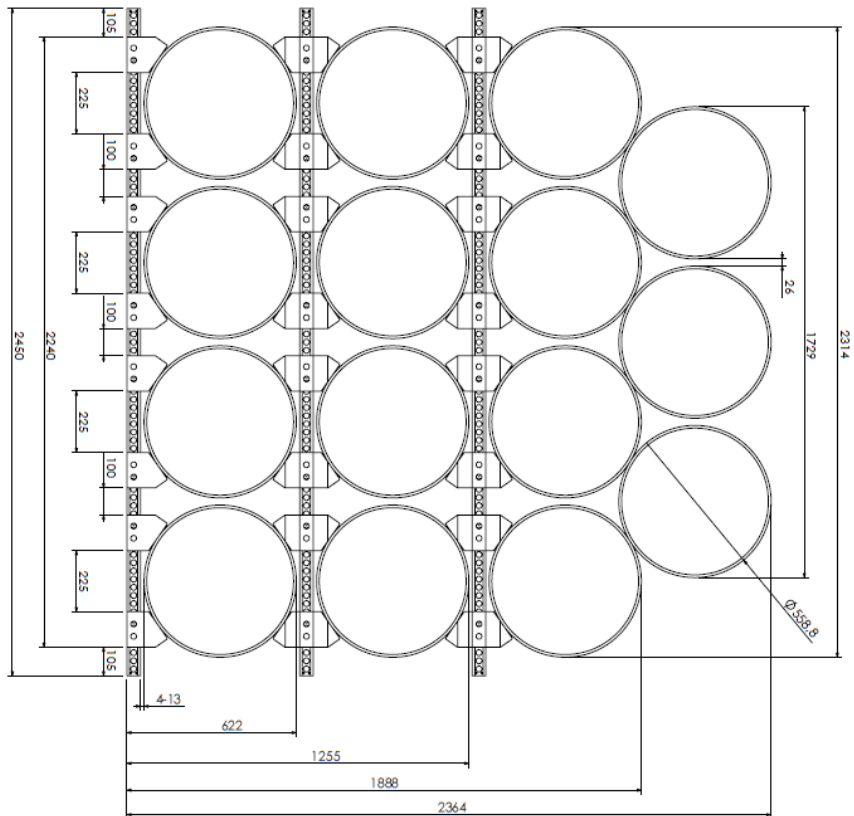

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eikensdijk 8
3571 SK, Breda
The Netherlands


Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

ECRI no. NI800930639
VAT no. NL8009.30.539.B01
Chamber of Commerce no. 17074402
IBAN no. NL39 RABO 0172 9113 62

System88 - Truck

Block	Type A	Ø 558.8
Block in middle	Type K	
Number of pipes	15	
Outside diameter [mm]	558.8	
Outside diameter [inch]	22	
Actual distance from pipe to profile [mm]	4-13	
Actual distance between pipes [mm]	26	

- Always check system88 instructions before use
- Maximum load of 3.795 kg on block A
- Always use the correct pin for the correct block
- Always secure each block with 1 locking pin
- Replace block in case it shows permanent deformation
- The pipes must be supported by the blocks only and not touch the steel profile
- The blocks must be secured with the correct pin
- Always use rubber layer in combination with rubber layer
- If using rubber layer, tighten the down again after 10 minutes**
- Make sure when multiple pipes are transported of the same time, all pipes are secured
- Deviate from this advice only in consult with dhatec



Pins should be fitted in the free holes


The sum of all tie-downs must be 5.540 ddn for 25 ton load (check label on tie-down)
The sum of all tie-downs must be 6.470 ddn for 30 ton load (check label on tie-down)

Revision date:
3-6-2016



SHEET 1 OF 1


Appendix B Standard Configurations Train block A

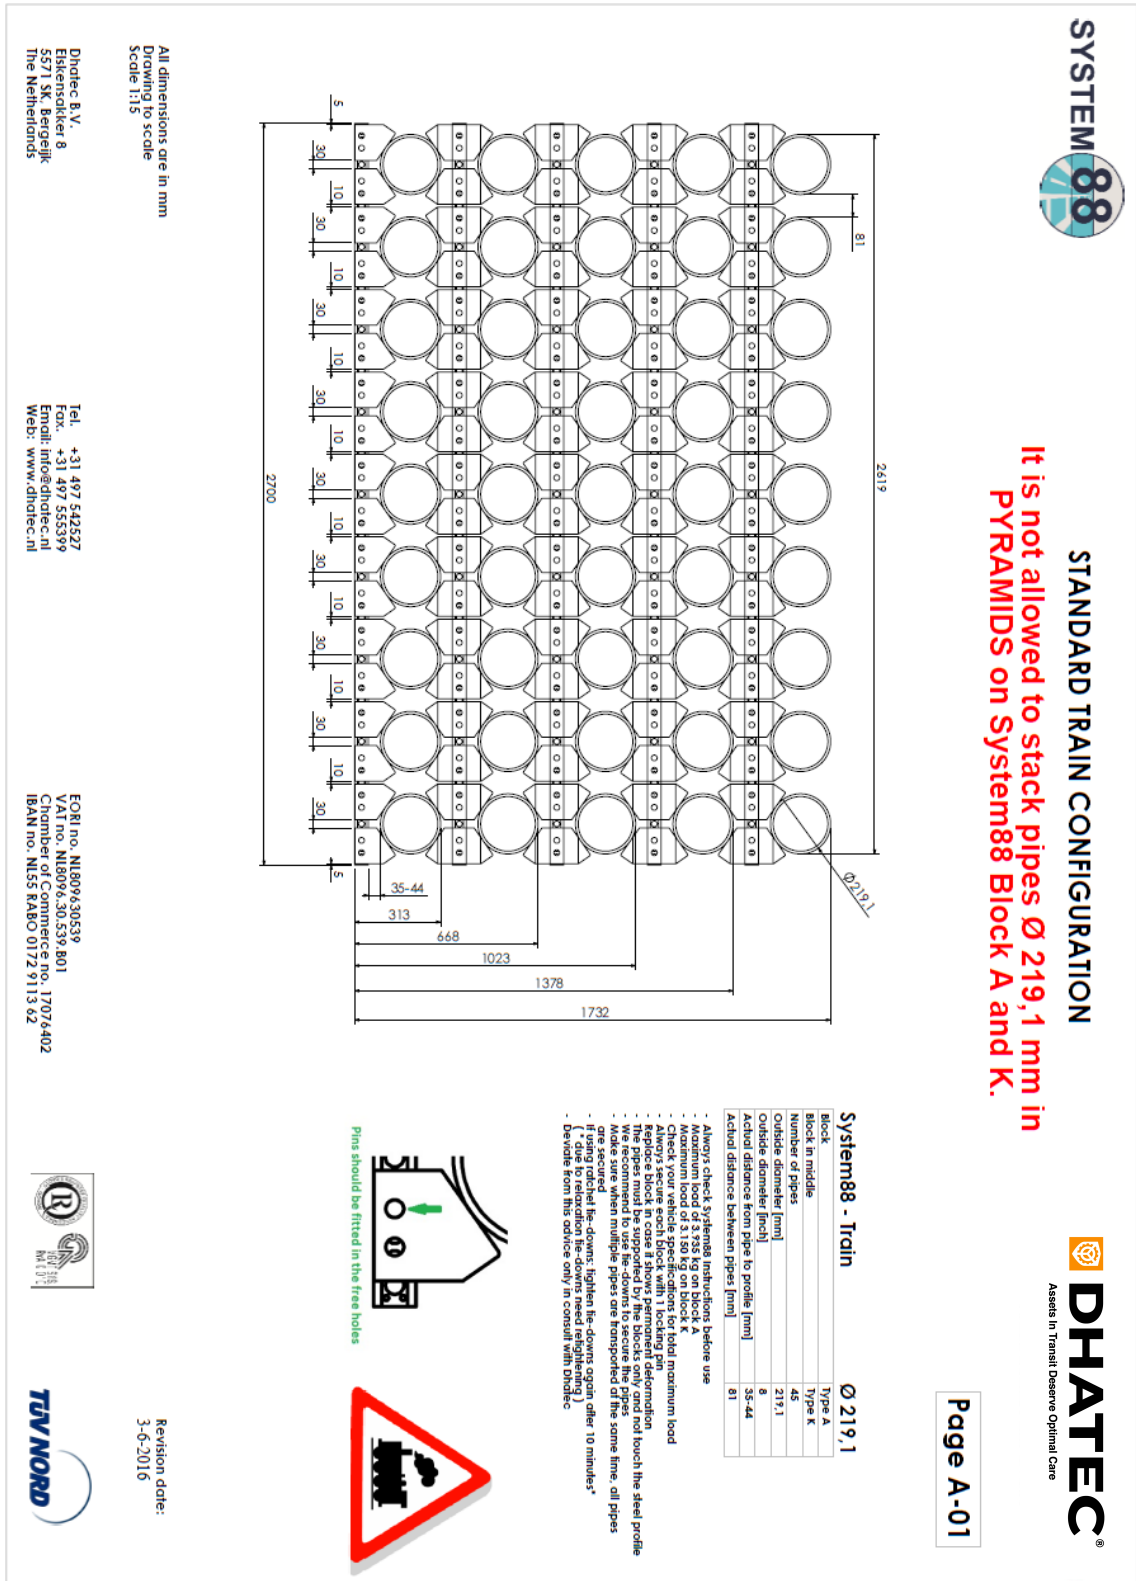

STANDARD TRAIN CONFIGURATION




Page A-02-1

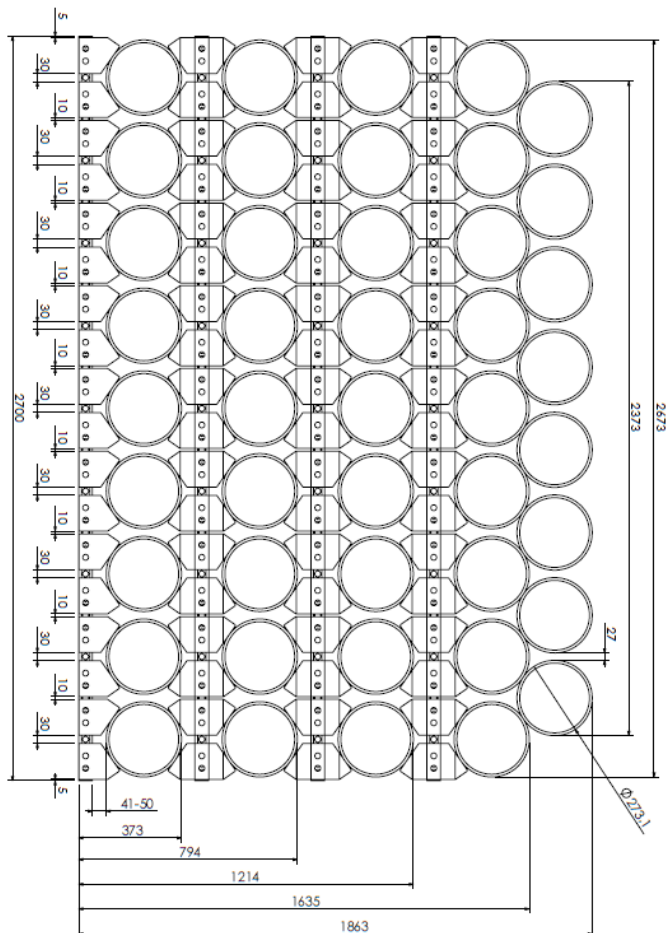

System88 - Train

System88 - Train		Ø 273,
Block		Type A
Block in middle		Type K
Number of pipes		44
Outside diameter [mm]		273.1
Outside diameter [inch]		10
Actual distance from pipe to profile [mm]		41-50
Actual distance between pipes [mm]		27

- Always check systems instructions before use
- Maximum load of 2,325 kg on block A
- Maximum load of 2,325 kg on block B
- Check your vehicle specifications for total maximum load
- Always secure each block with 1 locking pin
- Always make sure the tie-down is properly tensioned
- Always make sure the tie-down is properly secured to the tie-down anchor point on the steel profile
- We recommend to use tie-downs to secure the pipes
- Make sure when multiple pipes are transported at the same time, all pipes are secured
- If using ratchet tie-downs, tighten tie-downs again after 10 minutes*
 - (* due to relaxation tie-downs need re-tightening)
- Deviate from this advice only in consult with Dethlefs



Pins should be fitted in the free holes



All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Elkensaker 8
5571 SK, Bergeijk
The Netherlands

Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EORI no. NL809630539
VAT no. NL8096.30.539.B01
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62

Revision date:
3-6-2016




STANDARD TRAIN CONFIGURATION



Assets In Transit Deserve Optimal Care

Page A-03

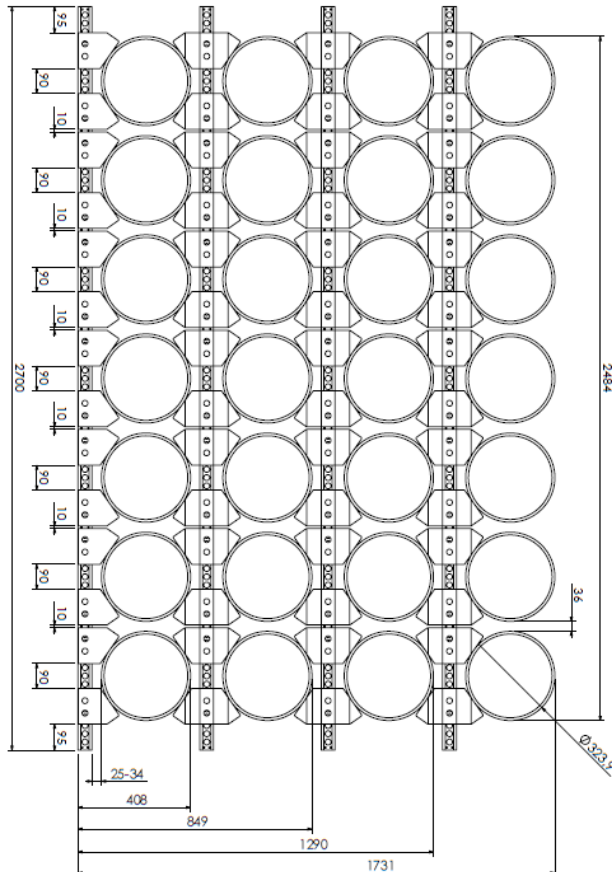

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eiskenstakker 8
5571 SK, Bergeijk
The Netherlands


Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EOIR no. NI809630539
VAT no. NI8096.30.539.801
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62

System88 - Train

Block	Type A
Block in middle	Type K
Number of pipes	26
Outside diameter [mm]	323.9
Outside diameter [inch]	12
Actual distance from pipe to profile [mm]	22-34
Actual distance between pipes [mm]	36

- Always check system88 instructions before use
- Maximum load of 3355 kg on block A
- Check your vehicle specifications for total maximum load
- Always secure each block with 1 locking pin
- Replace block in case it shows permanent deformation
- Do not touch the steel profile
- We recommend to use tie-downs to secure the pipes
- Make sure when multiple pipes are transported at the same time, all pipes are secured
- If you use additional tie-downs, tighten tie-downs again after 10 minutes*
- (* due to relaxation tie-downs need retightening)
- Deviate from this advice only in consult with Dhatec



Pins should be fitted in the free holes

Revision date:
3-6-2016






STANDARD TRAIN CONFIGURATION



Assets In Transit Deserve Optimal Care

Page A-03-1

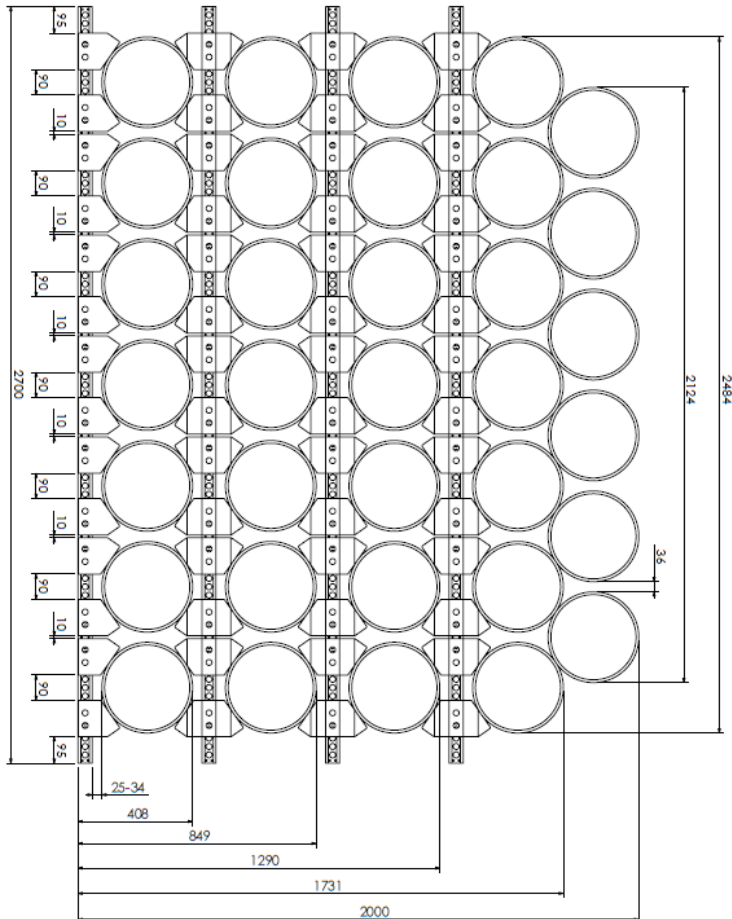

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Elkensloot 8
5571 SK, Bergeijk
The Netherlands


Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EORI no. NL809630539
VAT no. NL8096.30.539.801
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62

System88 - Train

Block	Type A
Block in middle	Type K
Number of pipes	34
Outside diameter [mm]	323.9
Outside diameter [inch]	12
Actual distance from pipe to profile [mm]	25-34
Actual distance between pipes [mm]	34

- Always check system88 instructions before use
- Maximum load of 5,535 kg on block A
- Maximum load of 5,150 kg on block K
- Check your vehicle specifications for total maximum load
- Always use proper tie-down technique to secure the pipes
- Repairs block in case it shows permanent deformation
- The pipes must be supported by the blocks only and not touch the steel profile
- We recommend to use tie-downs to secure the pipes
- If using system88 multiple pipes are transported at the same time, all pipes are secured
- If using ratchet tie-downs, tighten tie-downs again after 10 minutes*
- (* due to relaxation tie-downs need retightening)
- Deviate from this advice only in consult with Dhatec



Pins should be fitted in the free holes



Revision date:
3-6-2016






STANDARD TRAIN CONFIGURATION



Page A-04

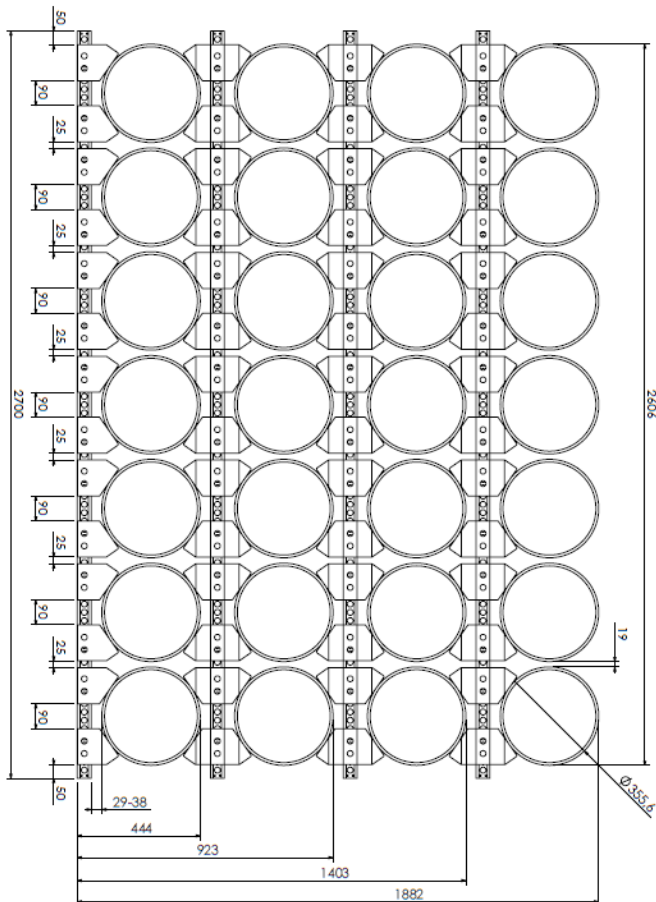

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eikensdijk 8
5571 NK Bergeijk
The Netherlands


Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EOI no. NL809/30539
VAT no. NL809/30539/801
Company no. 17074-402
IBAN no. NL55 RABO 0172 9113 92

System88 - Train

Block	Type A	Type K
Block in middle	28	355.6
Number of pipes	28	14
Outside diameter [mm]	355.6	27-38
Actual distance from pipe to profile [mm]	19	

- Always check System88 instructions before use
- Maximum load of 3,150 kg on block A
- Check your vehicle specifications for total maximum load
- Check your vehicle specifications for total maximum load
- The pipes must be supported by the blocks only and not touch the steel profile
- We recommend to use tie-downs to secure the pipes
- When multiple pipes are transported at the same time, all pipes are secured
- If using ratchet tie-downs, tighten tie-downs again after 10 minutes* (due to relaxation tie-downs need re-tightening)
- Deviate from this device only in consult with Dhatec



Pins should be fitted in the free holes



Revision date:
3-6-2016






STANDARD TRAIN CONFIGURATION



Page A-04-1

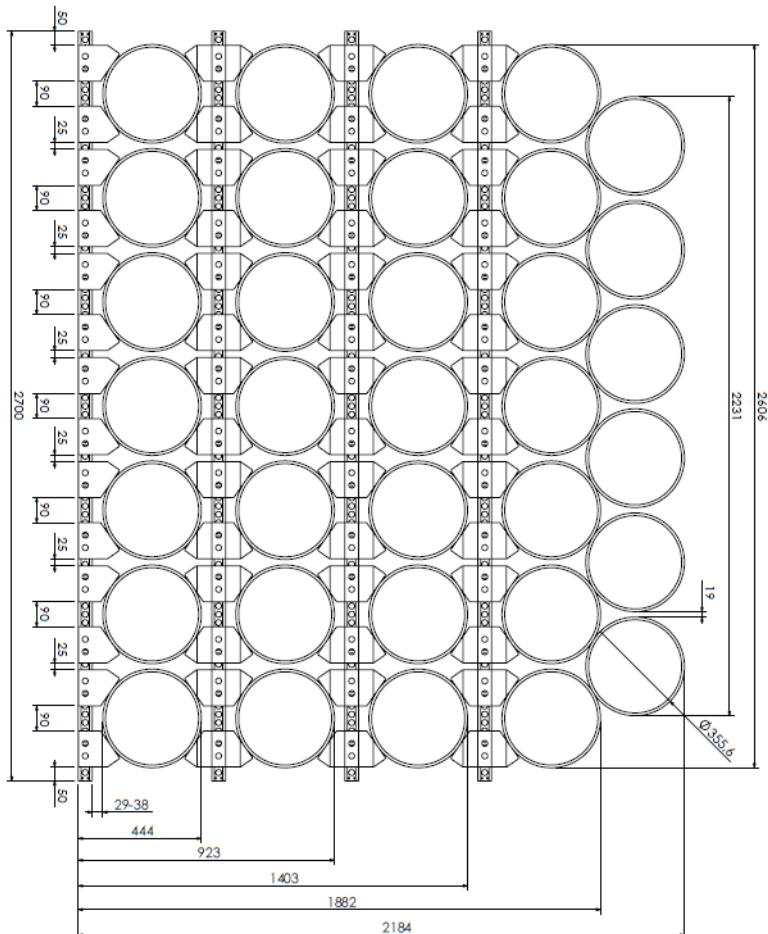

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eikensloot 8
5571 SK, Bergeijk
The Netherlands

Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl


EORI no. NL8096.30539
VAT no. NL8096.30.539.801
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62

System88 - Train

Ø 355,6

Block	Type A
Block in middle	Type K
Number of pipes	32x6
Outside diameter [mm]	355,6
Outside diameter [inch]	14
Actual distance from pipe to profile [mm]	29-38
Actual distance between pipes [mm]	19

- Always check system88 instructions before use
- Maximum load of 5 t55 kg on block A
- Maximum load of 5 t55 kg on block K
- Check your vehicle specifications for field maximum load
- Always secure each block with 1 locking pin
- Replace block in case it shows permanent deformation
- Do not touch the steel profile
- We recommend to use tie-downs to secure the pipes
- Make sure when multiple pipes are transported at the same time, all pipes are secured
- If transport tied tie-downs: tighten tie-downs again after 10 minutes*
- (* due to relaxation tie-downs need retightening)
- Deviate from this advice only in consult with dhatec



Pins should be fitted in the free holes



Revision date:
3-6-2016






STANDARD TRAIN CONFIGURATION



Page A-05

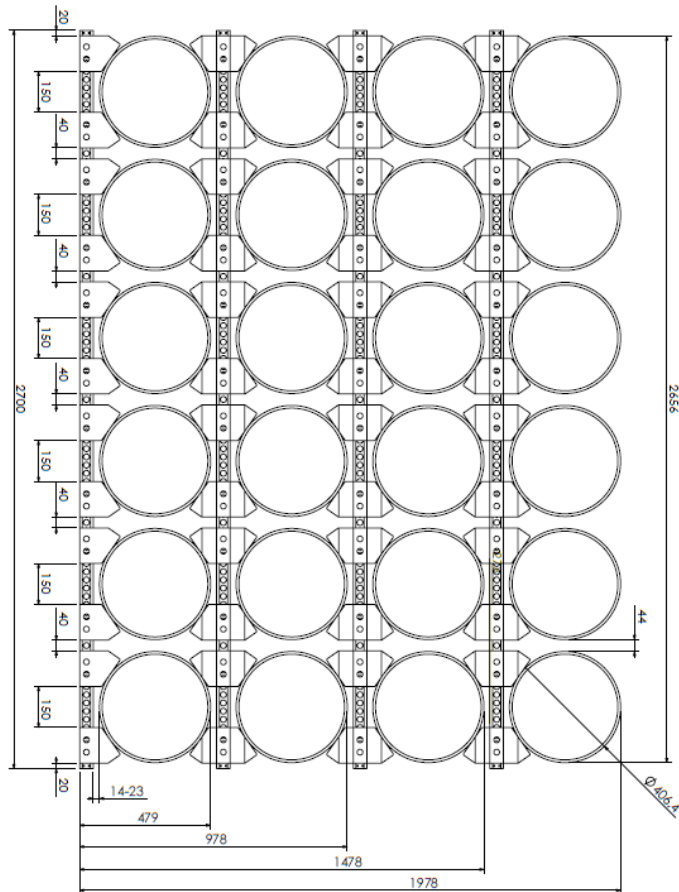

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eisvesscken 8
5571 XK, Bergeijk
The Netherlands


Tel. +31 497 542327
Fax. +31 497 553399
Email: info@dhatec.nl
Web: www.dhatec.nl

EORI no. NL809630539
CAI no. NL8096.50.539.B01
Number of Connections no. 17074402
IBAN no. NL55 NABO 0172 9113 02

System88 - Train

Block	Type A
Block in middle	Type K
Number of pipes	24
Outside diameter [mm]	406.4
Outside diameter [inch]	16
Actual distance from pipe to profile [mm]	14-23
Actual distance between pipes [mm]	44

- Always check system88 instructions before use
- Maximum load of 3.935 kg on block A
- Maximum load of 3.935 kg on block K
- Check your vehicle specifications for total maximum load
- Always secure each block with 1 locking pin
- Replicate block in case it shows permanent deformation
- Do not use the same block for more than 10 minutes
- Do not touch the steel profile
- We recommend to use tie-downs to secure the pipes
- Make sure when multiple pipes are transported at the same time, all pipes are secured
- If you use tie-downs, tighten tie-downs again after 10 minutes*
- (* due to relaxation tie-downs need retightening)
- Deviate from this advice only in consult with Dhatec



Pins should be fitted in the free holes

Revision date:
3-6-2016






STANDARD TRAIN CONFIGURATION



Assets In Transit Deserve Optimal Care

Page A-05-1

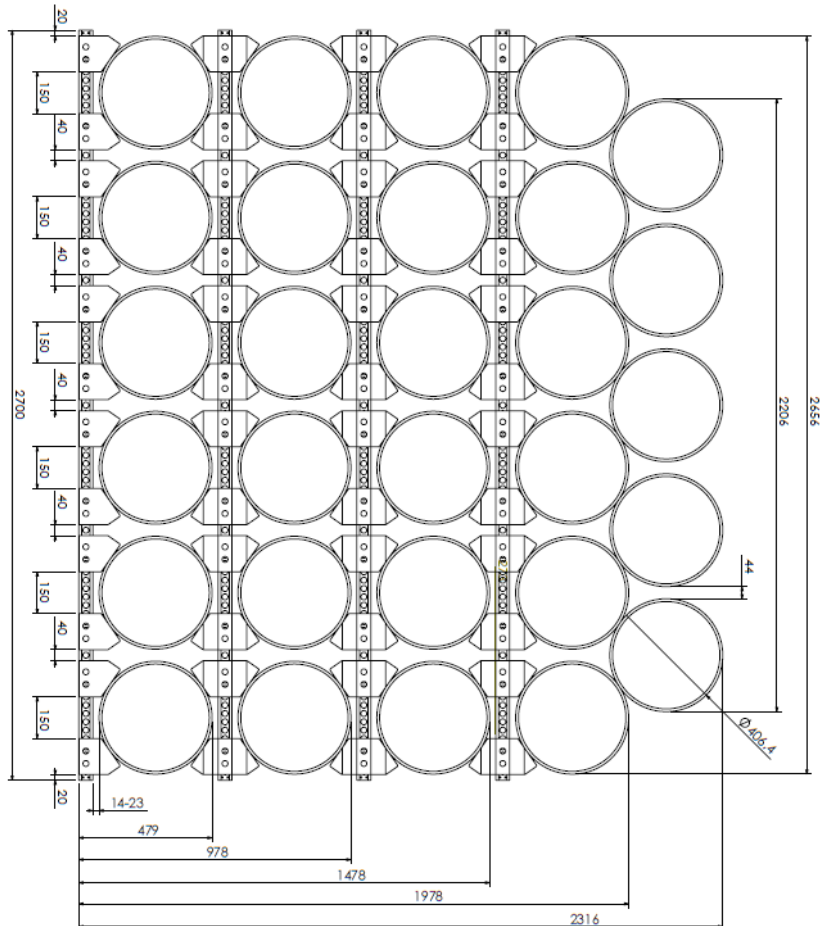

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eisensloot 8
5571 SK, Bergeijk
The Netherlands

Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl


EORI no. NL809630539
VAT no. NL8096.30.539.801
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62

System88 - Train

Ø 406,4

Block	Type A
Block in middle	Type K
Number of pipes	29
Outside diameter [mm]	406,4
Outside diameter [inch]	16
Actual distance from pipe to profile [mm]	14-23
Actual distance between pipes [mm]	44

- Always check system88 instructions before use
- Maximum load of 5.935 kg on block A
- Maximum load of 5.935 kg on block K
- Check your vehicle specifications for total maximum load
- Always secure each block with 1 locking pin
- Replicate block in case it shows permanent deformation
- Do not touch the steel profile
- We recommend to use tie-downs to secure the pipes
- Make sure when multiple pipes are transported at the same time, all pipes are secured
- If you cannot tie-down: tighten tie-downs again after 10 minutes*
- (* due to relaxation tie-downs need retightening)
- Deviate from this advice only in consult with dhatec



Pins should be fitted in the free holes

Revision date:
3-6-2016






STANDARD TRAIN CONFIGURATION



Assets In Transit Deserve Optimal Care

Page A-06

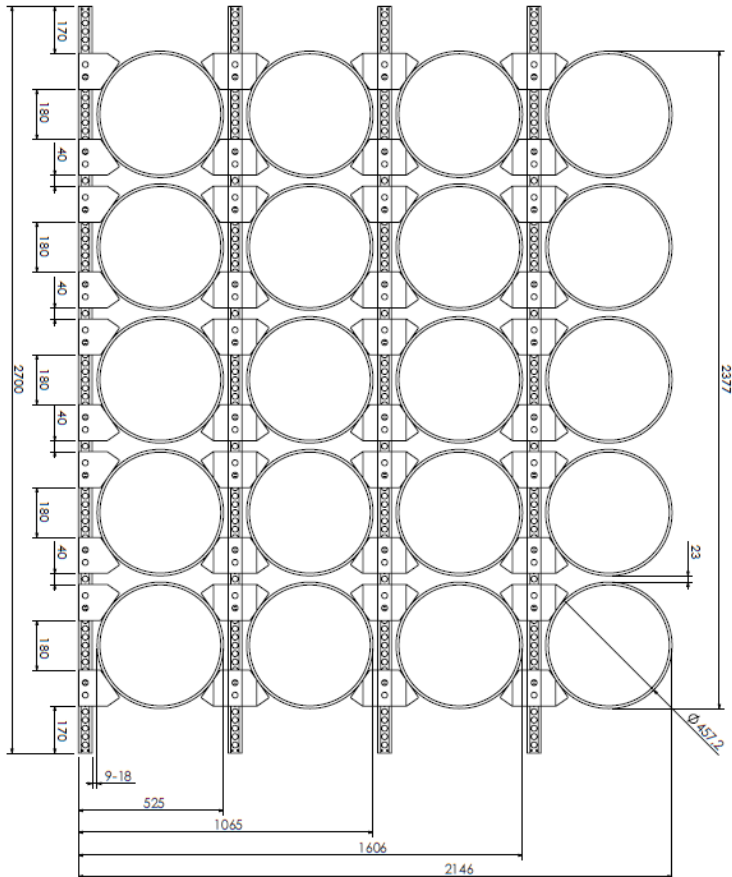

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eikensloot 8
5571 SK, Bergeijk
The Netherlands


Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EORI no. NL8096.30539
VAT no. NL8096.30.539.801
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62

System88 - Train

Block	Type A	Type K
Block in middle	20	20
Number of pipes	457.2	457.2
Outside diameter [mm]	18	18
Actual distance from pipe to profile [mm]	9-18	9-18
Actual distance between pipes [mm]	23	23

- Always check System88 instructions before use
- Maximum load of 3.935 kg on block A
- Maximum load of 3.935 kg on block K
- Check your vehicle specifications for total maximum load
- Always secure each block with 1 locking pin
- Always use the correct pin for the correct block
- Replace block if cause it had by permanent deformation
- The pipes must be supported by blocks, never touch the steel profile
- We recommend to use tie-downs to secure the pipes
- Make sure when multiple pipes are transported at the same time, all pipes are tied with tie-downs, tighten tie-downs again after 10 minutes*
- (* due to relaxation tie-downs need retightening)
- Deviate from this advice only in consult with Dhatec



Pins should be fitted in the free holes

Revision date:
3-6-2016






STANDARD TRAIN CONFIGURATION



Page A-06-1

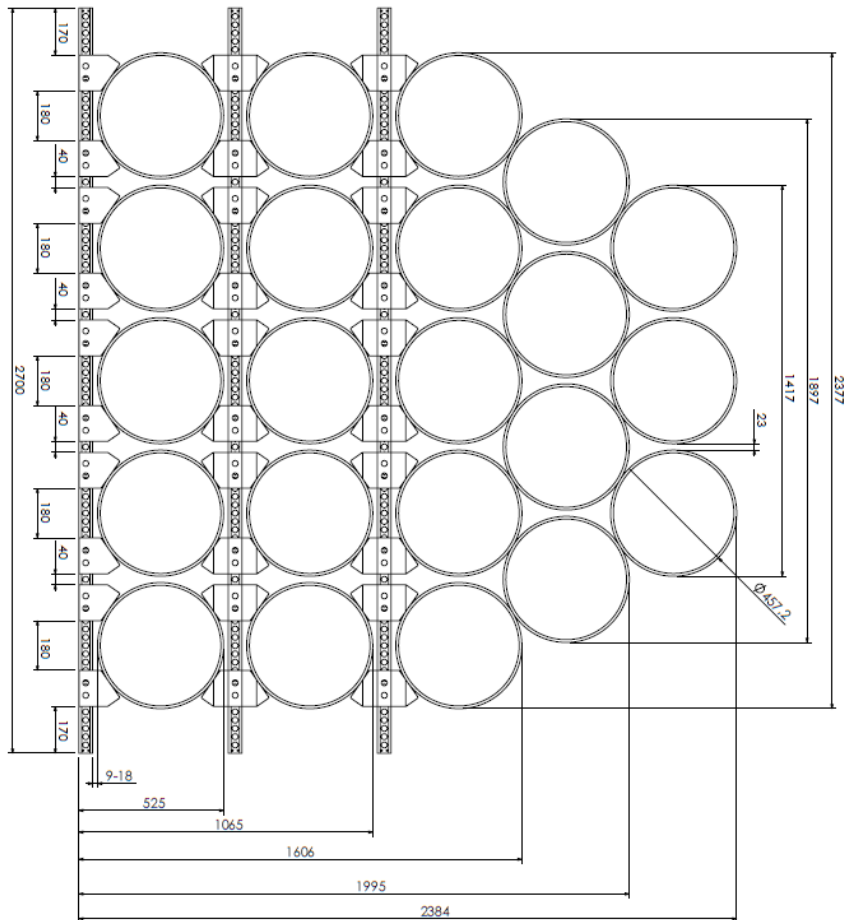

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eikensdijk 8
5571 SK, Bergeijk
The Netherlands

Tel: +31 497 542527
Fax: +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EOBI no. NI809630539
VAT no. NI809630539 B01
Chamber of Commerce no. 17074402
IBAN no. NL55 RABO 0172 9113 52




Revision date:
3-6-2016

System88 - Train

Block	Type A	Type K
Block in middle	22	22
Number of pipes	22	22
Outside diameter [mm]	457.2	457.2
Outside diameter [inch]	18	18
Actual distance from pipe to profile [mm]	9-18	9-18
Actual distance between pipes [mm]	23	23

- Always check System88 instructions before use
- Maximum load of 3,150 kg on block A
- Check your vehicle specifications for total maximum load
- Always use the correct tie-down technique (1500kg per tie-down)
- The pipes must be supported by the blocks only and not touch the steel profile
- Replace block in case it shows permanent deformation
- Make sure to use the tie-downs to secure the pipes
- Make sure the tie-downs are secured at the same time, all pipes are secured
- If using ratchet tie-downs: tighten tie-downs again after 10 minutes*
- * do not include the own load of the ratchet tie-down
- Deviate from the device only in consult with Dhatec



Pins should be fitted in the free holes






STANDARD TRAIN CONFIGURATION



Page A-07

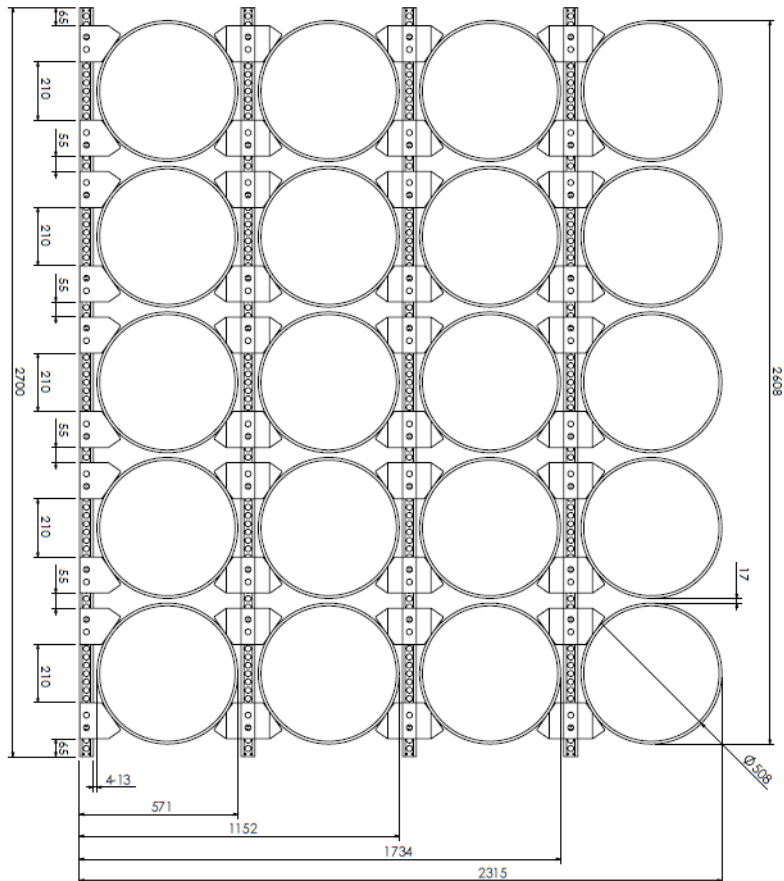

All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Eisenslokker 8
5571 SK, Bergeijk
The Netherlands


Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EOI no. NL809630539
VAT no. NL8096.30.539.801
Chamber of Commerce no. 17074402
IBAN no. NL55 RABO 0172 9113 62

System88 - Train

Block	Type A	Ø 508.0
Block in middle	Type K	
Number of pipes	20	
Outside diameter [mm]	508.0	
Outside diameter [inch]	20	
Actual distance from pipe to profile [mm]	4-13	
Actual distance between pipes [mm]	17	

- Always check system88 instructions before use
- Maximum load of 3.150 kg on block K
- Check your vehicle specifications for total maximum load
- Always secure each block with 1 locking pin
- Always use the correct pin for the correct deformation
- The pipes must be supported by the blocks only and not touch the steel profile
- We recommend to use tie-downs to secure the pipes
- Make sure when multiple pipes are transported at the same time, all pipes are secured
- If using ratchet tie-downs, tighten tie-downs again after 10 minutes* (* due to relaxation tie-downs need retightening)
- Deviate from this advice only in consult with Dhatec



Pins should be fitted in the free holes



Revision date:
3-6-2016


STANDARD TRAIN CONFIGURATION



System88 - Train

System88 - Train		Ø 508,0
Block		Type A
Block in middle		Type K
Number of pipes	22	
Outside diameter [mm]	508,0	
Outside diameter [inch]	20	
Actual distance from pipe to profile [mm]	4.13	
Actual distance between pipes [mm]	17	

- Always check system's instructions before use
- Maximum load of 550 kg on block A
- Check your vehicle specifications for total maximum load
- Always secure your block with 1 locking pin
- The pins must be inserted into the holes in the rear of the pipes and must not touch the steel profile
- We recommend to use the supports for the blocks only and not touch the pipes
- Make sure when multiple pipes are compressed at the same time, all pipes
- if using retractable tie-downs, tighten tie-downs again after 10 minutes*
 - (due to relaxation tie-downs need re-tightening)
- Deviate from this advice only in consult with Dethlefs



All dimensions are in mm
Drawing to scale
Scale 1:15

Dhatec B.V.
Elskensakker 8
5571 SK, Bergeijk
The Netherlands


Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EORI no. NL809630539
VAT no. NL8096.30.539.B01
Chamber of Commerce no. 17076402
IBAN no. NL55 RABO 0172 9113 62

Revision date:
3-6-2016



STANDARD TRAIN CONFIGURATION

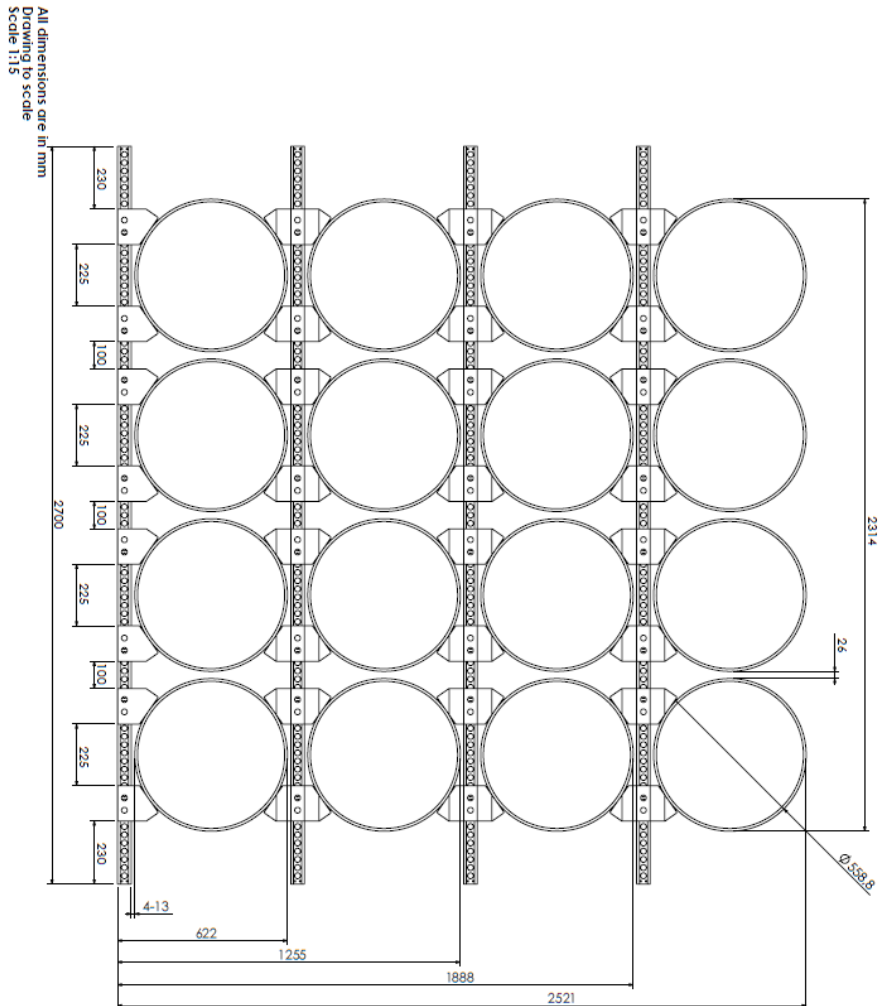

Dhatec B.V.
Eikenhout 8
5571 SX, Bergeijk
The Netherlands

Tel: +31 497 543527
Fax: +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EOIR no. NI809430539
VAT no. NI809430539 801
Chamber of Commerce no. 17074402
IBAN no. NL55 RABO 0172 913 62




Page A-08

System88 - Train

Block	Type A	Type B
Block in middle	14	14
Number of pipes	14	14
Outside diameter [mm]	558.8	558.8
Outside diameter [mm]	22	22
Actual distance between pipes [mm]	24	24

- Always check system88 instructions before use
- Maximum load of 3.155 t on block A
- Maximum load of 3.155 t on block B
- Check your vehicle specifications for total maximum load
- Always secure each block with 1 locking pin
- The pipes should be transported in a container or on a pallet
- The pipes should be supported by the blocks only and not touch the steel profile
- We recommend to use tie-downs to secure the pipes
- Make sure when multiple pipes are transported at the same time, all pipes
- if using ratchet tie-downs, tighten tie-downs again after 10 minutes*
- * due to relaxation tie-downs need retightening
- Devote from this advice only in consult with Dhatec



Pins should be fitted in the free holes

Revision date:
3-6-2016






STANDARD TRAIN CONFIGURATION




Page A-08-1

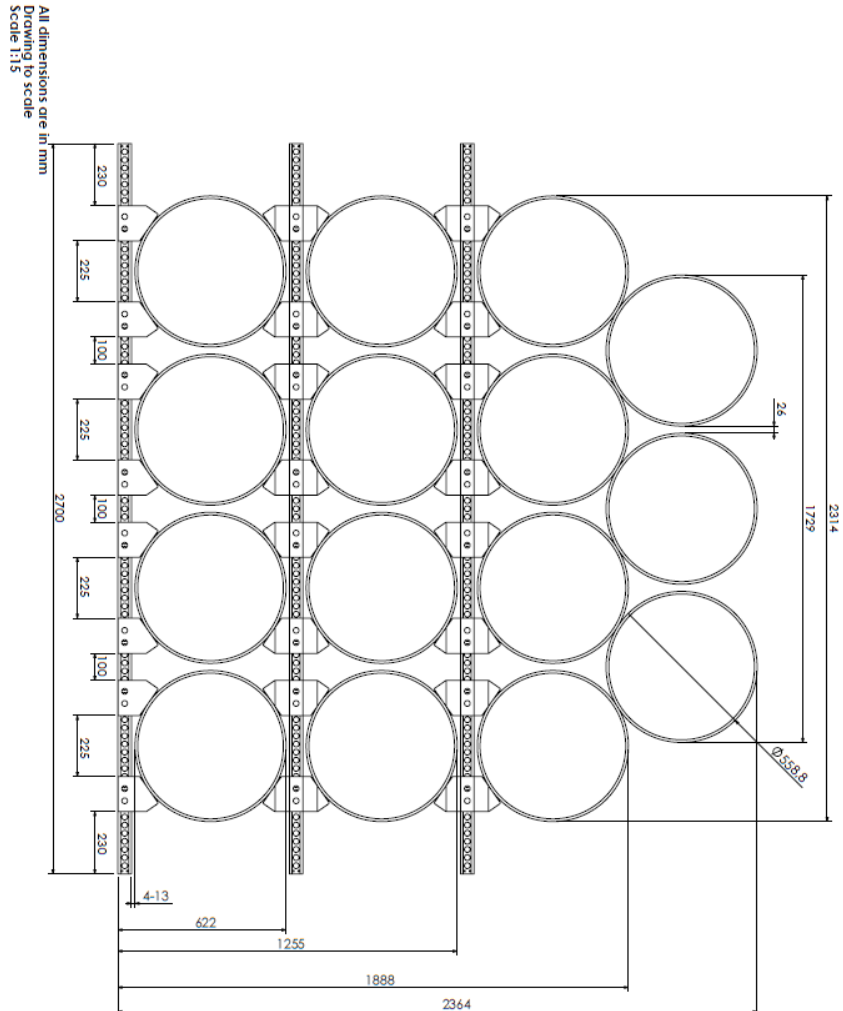

System88 - Train

Block	Type A	Ø 558,8
Block in middle	Type A	
Number of pipes	15	
Outside diameter [mm]	558,8	
Actual distance from pipes to profile [mm]	22	
Actual distance between pipes [mm]	4-13	
	24	

- Always check system88 instructions before use
- Maximum load 150 kg on block A
- Maximum load 3.150 kg on block K
- Check your vehicle specifications for total maximum load
- Always secure each block with 1 locking pin
- The pipes must be supported by the blocks only and not touch the steel profile
- We recommend to use tie-downs to secure the pipes
- Make sure when multiple pipes are transported at the same time, all pipes
- if using ratchet tie-downs: tighten tie-downs again after 10 minutes*
- (* due to relaxation tie-downs need retightening)
- Deviate from this advice only in consult with dhatec



Pins should be fitted in the free holes



Dhatec B.V.
Eikensdijk 8
5571 SK, Breda
The Netherlands

Tel. +31 497 542527
Fax. +31 497 555399
Email: info@dhatec.nl
Web: www.dhatec.nl

EOIR no. NL809630539
VAT no. NL809630539 B01
Chamber of Commerce no. 17074402
IBAN no. NL55 RABO 0172 9113 62



Revision date:
3-6-2016

Appendix C Calculation for securing pipe loads

1. Calculation for securing pipe loads (March 2th 2011)

Securing the load of pipes, total 27.000 kg (ref. [1],[2],[3],[4])

See figure 2 for maximum inertial forces of the load to be considered

Load of pipes on trailer 27.000 kg (F_g)

1.1. Calculation of needed tie-downs **WITH** the use of (Dhatec) Anti-skid layers between trailer and System88 and between System88 and pipes with $\mu = 0,6$

1.1.1. Load securing in driving direction

Inertial forces in driving direction, conform VDI 2700^[4] p.9

In forward direction **for trucks**: 0.8G

$F_m \text{ vorwärts} = 0,8 \times F_g = 0,8 \times 27.000 = 21.600 \text{ kg}$

Friction force with friction coefficient between pipes and PE-Blocks with the use of anti-skid layers $\mu = 0,60$ ^[4] VDI p.10

$F_w = \mu \times F_g = 0,60 \times 27.000 = 16.200 \text{ kg}$

Load securing force needed^[1] TLN p.149

$F_z = F_m \text{ vorwärts} - F_w = 21.600 - 16.200 = 5.400 \text{ kg} = 5.400 \text{ daN}$

The standard tension force (S_{TF}) is mentioned on the label of each tie-down and depends on the model of the ratchet. For the calculation, we assume that Dhatec ratchets are used with a S_{TF} of 750 daN. This information can be found on the label of the tie-down. When the load is lashed the tension in the belt is according to *DIN EN 12195 – 1*[3] 1,5 times the S_{TF} that is mentioned on the label. For this example, the needed tie-downs to secure the load is:

$5.400 \text{ daN} / (0,6 \times 1,5 \times 750 \text{ daN}) = \mathbf{8 \text{ Dhatec tie-downs.}}$

1.1.2. Load securing rectangular on driving direction

Inertial forces rectangular on driving direction, conform VDI 2700^[4]

$F_m \text{ sideways} = 0,5 \times F_g = 0,5 \times 27.000 = 13.500 \text{ kg}$

Friction coefficient between pipes and PE-Blocks

with the use of anti-skid layers: $\mu = 0,60$ ^[4] VDI p.10

$F_w = \mu \times F_g = 0,60 \times 27.000 = 16.200 \text{ kg}$

Load securing force needed^[1]

$F_z = F_m \text{ vorwärts} - F_w = 13.500 - 16.200 < 0 \text{ kg}$

For securing the load rectangular to the driving direction no additional tie-downs are needed.

1.1.3. Load securing contrary to driving direction

For securing the load against forces contrary to the driving direction no tie-downs are needed while the inertial forces for securing the load against moving backwards relative to the trailer are the same as the inertial forces during cornering. The calculation would therefore be the same as 1.1.2.

Conclusion: For securing a pipe load with a total weight of 27.000 kg, when using System88 for transport WITH antiskid layers with a friction coefficient of $>0,6$ between all contact surfaces, 8 tie-downs with a S_{TF} (standard tensioning force) of 750 daN are needed.

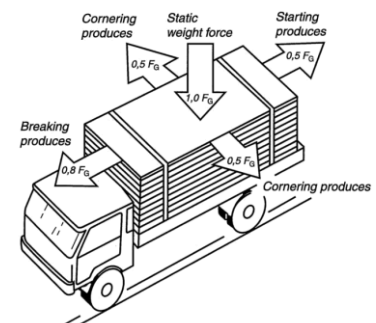


Fig. 26: Maximum inertial forces of the load to be considered for load safety (from VDI2700^[4])

References:

- [1] Smit, A., Lampen, A., Ladingzekering, Handboek van Transport en Logistiek Nederland voor het goed vastzetten van Lading, ISBN 90-75363-35-4, Februari 2003.
- [2] Kugele, M., Lampen, A., Sander, R., Dekra Praxisratgeber Ladungssicherung, Dekra Fachbuchreihe Fuhrpark, ISBN 978-3-938255-34-6, Juni 2007.
- [3] Ladungssicherung auf Straßenfahrzeugen - Aufbauten an Nutzfahrzeugen - Mindestanforderungen; Deutsche Fassung EN 12642, Januar 2006.
- [4] Verein Deutscher Ingenieure, VDI 2700 Ladungssicherung auf Straßenfahrzeugen, Berlin Beuth Verlag, November 2004.

2. Calculation for securing pipe loads (March 2th 2011)

Securing the load of pipes, total 27.000 kg (ref. [1],[2],[3],[4])

See figure 2 for maximum inertial forces of the load to be considered

Load of pipes on trailer 27.000 kg (F_g)

2.1. Calculation of needed tie-downs WITHOUT the use of (Dhatec) Anti-skid layers the friction between pipes and blocks is $\mu = 0,3$

2.1.1. Load securing in driving direction

Inertial forces in driving direction, conform VDI 2700^[4] p.9

$F_m \text{ vorwärts} = 0,8 \times F_g = 0,8 \times 27.000 = 21.600 \text{ kg}$

Friction force with friction coefficient between pipes and PE-Blocks without the use of anti-skid layers with $\mu = 0,3$
 $F_w = \mu \times F_g = 0,30 \times 27.000 = 8.100 \text{ kg}$

Load securing force needed^{[1]TLN p.149}

$F_z = F_m \text{ vorwärts} - F_w = 21.600 - 8.100 = 13.500 \text{ kg} = 13.500 \text{ daN}$

The standard tension force (S_{TF}) is mentioned on the label of each tie-down and depends on the model of the ratchet. For the calculation, we assume that ratchets are used with a S_{TF} of 750 daN. This information can be found on the label of the tie-down. When the load is lashed the tension in the belt is according to *DIN EN 12195 – 1*[3] 1,5 times the S_{TF} that is mentioned on the label. For this example, the needed tie-downs to secure the load is:

$13.500 \text{ daN} / (0,3 \times 1,5 \times 750 \text{ daN}) = 40 \text{ Dhatec tie-downs.}$

2.1.2. Load securing rectangular on driving direction

Inertial forces rectangular on driving direction, conform VDI 2700^[4]

$F_m \text{ sideways} = 0,5 \times F_g = 0,5 \times 27.000 = 13.500 \text{ kg}$

Friction coefficient between pipes and PE-Blocks is 0,3:

$F_w = \mu \times F_g = 0,30 \times 27.000 = 8.100 \text{ kg}$

Load securing force needed^[1]

$F_z = F_m \text{ vorwärts} - F_w = 13.500 - 8.100 = 5.400 \text{ kg}$

The needed securing force is already covered by the tie down that are mentioned under 2.1.1. For securing the load rectangular to the driving direction no additional tie-downs are needed.

2.1.3. Load securing contrary to driving direction

For securing the load against forces contrary to the driving direction no additional tie-downs are needed while the inertial forces for securing the load against moving backwards relative to the trailer are the same as the inertial forces during cornering. The calculation would therefore be the same as 2.1.2.

Conclusion: For securing a pipe load with a total weight of 27.000 kg for transport WITHOUT using antiskid mats, 40 tie-downs with a S_{TF} (standard tensioning force) of 750 daN are needed.

References:

- [1] Smit, A., Lampen, A., Ladingzekering, Handboek van Transport en Logistiek Nederland voor het goed vastzetten van Lading, ISBN 90-75363-35-4, Februari 2003.
- [2] Kugele, M., Lampen, A., Sander, R., Dekra Praxisratgeber Ladungssicherung, Dekra Fachbuchreihe Fuhrpark, ISBN 978-3-938255-34-6, Juni 2007.
- [3] Ladungssicherung auf Straßenfahrzeugen - Aufbauten an Nutzfahrzeugen - Mindestanforderungen; Deutsche Fassung EN 12642, Januar 2006.
- [4] Verein Deutscher Ingenieure, VDI 2700 Ladungssicherung auf Straßenfahrzeugen, Berlin Beuth Verlag, November 2004.

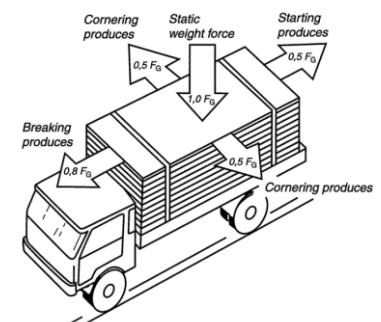


Fig. 27: Maximum inertial forces of the load to be considered for load safety (from VDI2700^[4])