

Datasheet Stack Cover

Release date : 15-01-2016
Revision date : 18-10-2017

General information

The Heavy Duty UV resistant coated PVC is used to cover stacks of pipes and gives protection against UV, rain, water, dirt and dust. The cover is held in place by the TIE-Down system to prevent movement of the cover. The Heavy Duty UV resistant coated PVC is suitable for long term pipe storage in all weather conditions.

Application

The Heavy Duty UV resistant coated PVC is positioned over a stack of pipes. The complete cover will be held in place by the Tie-down system.



Features

- ✓ Pipe protection against UV, rain, water, dirt and dust
- ✓ Suitable for long term pipe storage in all weather conditions
- ✓ Solution for all diameter pipes
- ✓ Available in a wide range of sizes
- ✓ Can be opened for pipe inspection

Material specifications

Material : PVC
Tensile strength wrap : 2.000 N/5cm*
Tensile strength weft : 2.000 N/5cm*
Tear resistance warp and weft : 200 daN**
Weight : 570 gr/m² (1.26lbs/10.8ft²)
(other options available on request)
Application temperature : -30°C / 70°C (-22°F / 158°F)

Tie Down:

Material : PES
Lashing capacity : 2.500 DaN 
Lashing capacity : 5.000 DaN 
S_{hf}, S_{tf} : 50, 300 DaN
Norm : EN 12195-2
Type : 50-HD

Product code : PVCC

Commodity / HS code : 39204390

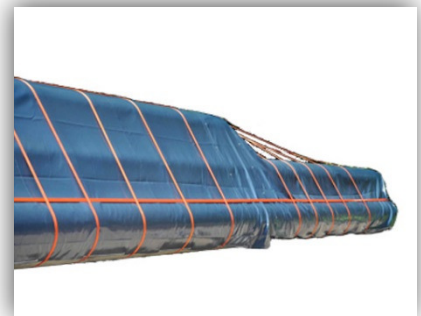


Fig.1 Stack Cover with Tie-downs



Fig.1 Stack Cover with Tie-downs

Manufacturing & Sales Company

DHATEC
Dragonder 19
5554 GM Valkenswaard
The Netherlands

Contact Us

T: +31 497 542 527
E: info@dhatec.nl
I: dhatec.nl
sealforlife.com

 **SEALFORLIFE**
Industries



Assets In Transit Deserve Optimal Care

Additional information

- UV-resistance: Suitable for long term outdoor use
- Application time: depends on the size of the pipe stack

* acc. DIN 53 354 BS 3424 method 6A

** acc. DIN 53 356 BS 3424 method 7A

Manufacturing & Sales Company

DHATEC

Dragonder 19
5554 GM Valkenswaard
The Netherlands

Contact Us

T: +31 497 542 527

E: info@dhatec.nl

I: dhatec.nl
sealforlife.com

