

Datasheet Flexible Recessed Cap

Release date : 10-06-2013

Revision date : 18-10-2017

General information

The Flexible Recessed Cap is suitable for hook lifting and closes the pipe against the elements. This protects the internal pipe surface.

Application

The Flexible Recessed Cap is placed over the pipe end and clamps itself to the outer pipe surface.

Features

- ✓ Fast and easy fitting and removal
- ✓ High resistance against tearing
- ✓ Suitable for hook lifting

Material specifications

Material : Low Density Polyethylene (LDPE)

Hardness : 40° shore D

Elasticity at break : 600 %

Tension at break : 21 Mpa

Modulus of elasticity : 60 Mpa

Material thickness : approx. 2mm (0.08")

Product range : On request

Product code : FRCY

Commodity / HS code : 39235090

Additional information

- Application temperature: -40°C / 60°C (-40°F / 140°F)
- Vent-hole is optional
- Breathable membrane is optional
- UV-resistance: For outdoor use: 0,5-2 years
- Application time: 1 – 2 minutes per pipe end
- Available in a wide range of standard and non-standard sizes



Fig.1 Flexible Recessed Cap



Fig.2 Pipe with Flexible Recessed Cap

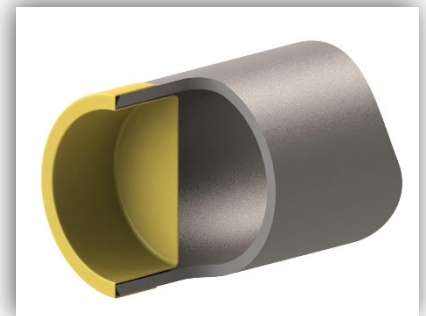


Fig.3 Pipe with Flexible Recessed Cap

Manufacturing & Sales Company

DHATEC
Dragonder 19
5554 GM Valkenswaard
The Netherlands

Contact Us

T: +31 497 542 527
E: info@dhatec.nl
I: dhatec.nl
sealforlife.com

 **SEALFORLIFE**
Industries