

Datasheet Flexible Pipe Cap

Release date : 10-06-2013

Revision date : 18-10-2017

General information

The Flexible Pipe Cap closes the pipe against the elements. This protects the interior of the pipe.

Application

The Flexible Pipe Cap is placed over the pipe end and clamps itself to the outer pipe surface.

Features

- ✓ Fast and easy fitting and removal
- ✓ High resistance against tearing
- ✓ The pipe can be sealed

Material specifications

Material : Low Density Polyethylene (LDPE)

Hardness : 40° shore D

Elasticity at break : 1600 %

Tension at break : 21 Mpa

Modulus of elasticity : 60 Mpa

Material thickness : approx. 2mm (0.08")

Product range : 50,8mm – 1.625,6mm (2" – 64")

Product code : FC

Commodity / HS code : 39235090

Additional information

- Application temperature: -40°C / 60°C (-40°F / 140°F)
- UV-resistance: For outdoor use: 0,5-2 years
- Application time: 1 – 2 minutes per pipe end
- Available in a wide range of standard and non-standard sizes



Fig.1 Flexible Pipe Cap

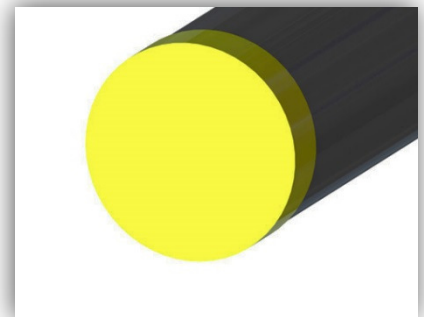


Fig.2 Pipe with Flexible Pipe Cap

Manufacturing & Sales Company

DHATEC
Dragonder 19
5554 GM Valkenswaard
The Netherlands

Contact Us

T: +31 497 542 527
E: info@dhatec.nl
I: dhatec.nl
sealforlife.com

 **SEALFORLIFE**
Industries